

ABOUT KARTELL^{UK}

A strategic alliance between manufacturing and sales.

Offering additional value to our brand, customers and stakeholders by an innovative approach to production, using the latest technologies, and service with creative thinking and a fresh approach.

Kartell UK Ltd was established in 2008 and developed in association with Coşkunöz Radyatör to become the sales, marketing and distribution arm in the UK, Ireland and France. With a focus on an innovative and forward thinking approach to radiator supply, Kartell UK Ltd is fast becoming one of the key suppliers and leading brands to the UK, Irish and French heating markets.

The route to market is via independent plumbing merchants with a focus and commitment to service and continuous improvement. Based in Bedford, the company works from a modern dedicated heating warehouse which is spread over 100,000 sq ft. In addition Kartell have now recently expanded and in August 2012 have also opened a further 100,000 sq ft warehouse based in Wigan, which is dedicated to servicing the north of the country.

Coşkunöz Radyatör A.S. is a leading company in the HVAC sector. Coşkunöz has a future orientated vision with continuous improvements with an aim to 'spread warmth around the world'. The manufacturing base is in Bursa, Turkey, on a site which is ultra modern utilises the latest technologies and is spread across 300,000 sq ft.

With annual capacities exceeding 2.5m radiators the company is a global force in the markets in which it operates with the products reaching over 30 countries in four different continents across the world.

Kartell UK Ltd and Coşkunöz have a shared vision

- To be a leading brand in the HVAC sector
- To create a positive impact on society and to the environment as a company
- To exceed customer expectations with continuous improvement
- To find innovative and unique solutions
- To adopt latest technologies very quickly
- To adopt creative thinking and a fresh approach



Online: www.kartelluk.com

KARTELL^{UK} CONTENTS

Welcome to the 2018 Kartell Trade catalogue. Our wide ranging portfolio of products will offer your customer the choice and flexibility they desire, ensuring that the most cost effective, efficient and stylish solution is close to hand. From the popular K-Rad Kompact range with its space saving elegance and efficiency through to the stylish Flat Panel designs, we have a range of classic solutions that suit every taste. For the more traditional interior, create your own solution and choose from our vast range of size options within our Cast Iron range, or if your customer's bathroom is their focus then select from a variety of heated towel rails within our K-Rails collection. To put it simply, the choice is yours.



General

Nationwide Delivery
Packaging
Distribution
Kartell Kolours

Pages 4-7

Panel Radiators

K-Rad Kompact
K-Rad Kompact Type 11
K-Rad Kompact Type 21
K-Rad Kompact Type 22
K-Rad Kompact Type 33

Pages 8-29

K-Rad LST Covers
K-Flat Kompact Vertical
K-Flat Kompact Horizontal
K-Flat Premium Kompact Vertical
K-Flat Premium Kompact Horizontal

Tubular Steel Radiators

Laser Klassic Horizontal
Laser Klassic Vertical

Pages 30-33

Cast Iron Radiators

Legacy
Floreal
Nostalgia

Pages 34-42

Towel Radiators

G4K Rail 22
K-Rail 22 (White)
K-Rail 22 (Chrome)
K-Rail New 25 (Chrome)

Pages 43-52

Electric Rails
Q Rails
S Rails



Our Kartell Kolours are available on most products. See page 7 for more details.


KARTELL^{UK} VALVES & ACCESSORIES



See pages 53-57 for the full collection



For a copy of our full Designer Range brochure and Bathroom Products, please contact the Sales Office or visit www.kartelluk.com

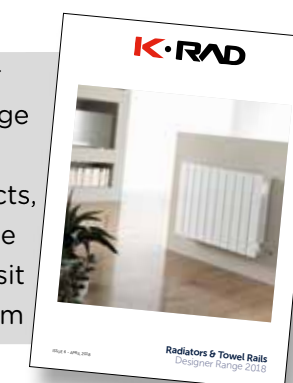

Kartell UK Ltd


16-19 The Manton Centre, Manton Lane, Bedford, MK41 7PX
Tel: 01234 363 393 Fax 01234 363 488 www.kartelluk.com

Unit 3 Greenbank Business Park, Swan Lane, Hindley Green, Wigan, WN2 4AY
Tel: 01942 257 800 Fax: 01942 257 900 www.kartelluk.com

This publication is issued subject to alteration or withdrawal without notice. The illustrations and specifications are not binding in detail. All offers and sales are subject to the company's current terms and conditions of sale. All prices shown throughout are correct at time of going to press.

Online: www.kartelluk.com

NATIONWIDE DELIVERY

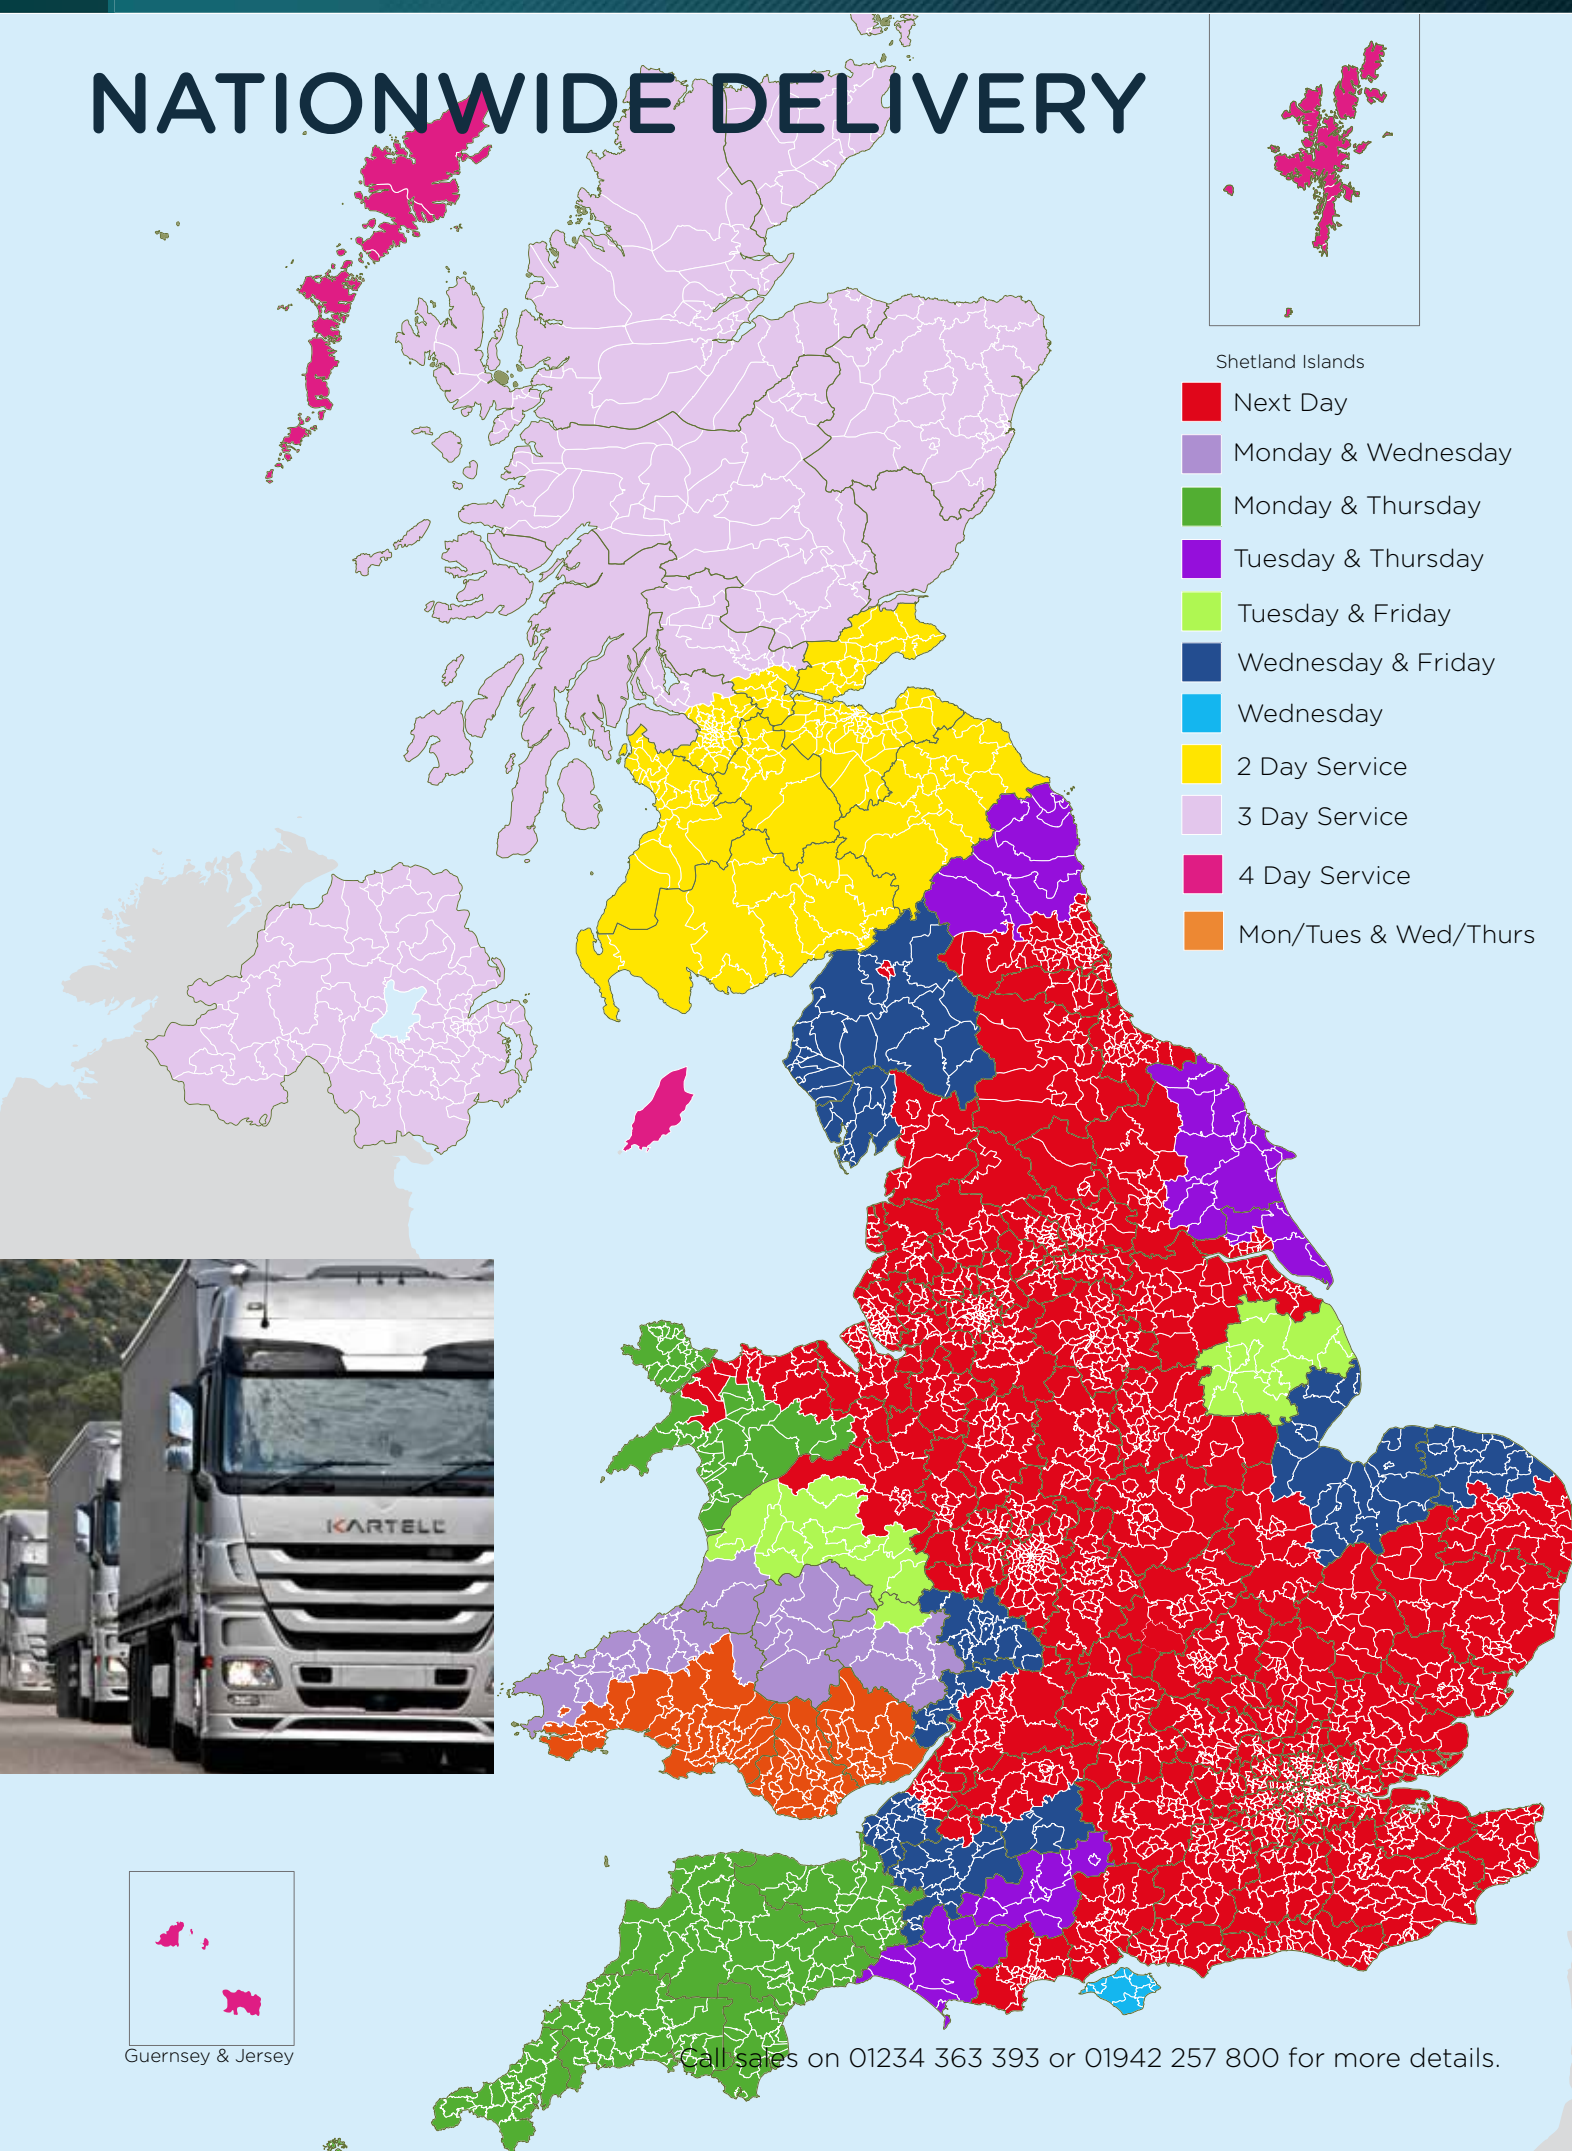

Call sales on 01234 363 393 or 01942 257 800 for more details.

PACKAGING

With over 200 years of combined experience supplying the world with radiator products, our team ensures that all Kartell products are supplied with packaging which is robust and effective. This means the product will always reach our customers, and in turn the users, in the best possible condition. The measures taken confirm that our commitment to continuous improvement and customer satisfaction is at the forefront of our thinking and ideologies.

Robust plastic corner protection

Bubble wrapped

Polythene sealed

Colour coded side carton for ease of identification

- Red - K-RAD Kompact
- Green - K-FLAT standard
- Yellow - K-FLAT premium

Identification label on front and side of the product



Online: www.kartelluk.com

DISTRIBUTION

Our warehousing is dedicated to radiator and heating products. It is fully racked and runs as a 24 hour operation.

All product lines are available ex-stock and we aim to maintain 100% service levels based on a 2/3 day lead time. We deliver to the UK, Ireland and France from Bedford and Wigan. We offer next day delivery to most of the UK, and other areas have 2/3 set delivery days each week. For further details on delivery, see the map on page 4. Please note the delivery key is specific to individual products. Lead-times can vary should they require any specific preparation.

DELIVERY CODE A	DELIVERY CODE B	DELIVERY CODE C	DELIVERY CODE D
THIS ITEM NORMALLY DISPATCHED WITHIN 48 HOURS OF ORDER	THIS ITEM NORMALLY DISPATCHED WITHIN 3-5 DAYS OF ORDER	THIS ITEM NORMALLY DISPATCHED WITHIN 7-10 DAYS OF ORDER	THIS ITEM NORMALLY DISPATCHED WITHIN 4-6 WEEKS OF ORDER

KEY INFORMATION

CAUTION

When designing for domestic systems we recommend that the K-RAD Kompact be used only in heating systems complying with British Standard Code of Practice for Central Heating for Domestic Premises BS 5449 Part 1.

WATER TREATMENT

On completion of the installation, the system should be properly flushed and filled in accordance with the British Standard Code of Practice for the Treatment of Water in Domestic Hot Water Central Heating Systems BS 7593.

This will remove flux residues and installation debris, which might promote corrosion and damage within the system.

If it is decided to apply a corrosion inhibitor to maximize the working life of the system, it should be applied in accordance with the manufacturer's instructions and should be suitable for the particular metals within the system.

Correction factor table			
Factors for differences between mean water temperatures and room temperature in °C and °F other than 50°C (90°F)			
°C (Δt)	CF	°F (Δt)	CF
5	0.050	10	0.057
10	0.123	20	0.142
15	0.209	30	0.240
20	0.304	40	0.348
25	0.406	50	0.466
30	0.515	60	0.590
35	0.629	70	0.721
40	0.748	80	0.858
45	0.872	90	1.000
50	1.000	100	1.147
51	1.026	110	1.298
52	1.052	120	1.454
53	1.079	130	1.613
54	1.105	140	1.776
55	1.132		
55.5	1.145		
56	1.159		
57	1.186		
58	1.213		
59	1.240		
60	1.267		
65	1.406		
70	1.549		
75	1.694		

The outputs shown within this brochure are based on BS EN442, 75-65-20°C operating conditions, giving a Δt of 50°C, for Δt's other than these, a correction factor must be applied.

Example: Output required @ 82-71-21°C Δt 55.5 the CF = 1.145, therefore multiply the listed output by the correction factor to give actual radiator output under these operating conditions.

Online: www.kartelluk.com

KARTELL KOLOURS

A selection of our most popular RAL colours are available on most products, for those that require a more unique look. Our Kartell Kolours are ready to go so your product can be delivered to you in 2 weeks.



RAL 9010 Pure White	RAL 1013 Oyster White	RAL 9002 Grey White	RAL 7032 Pebble Grey	RAL 7001 Silver Grey
RAL 5024 Pastel Blue	RAL 5002 Ultramarine	RAL 7016 Anthracite	RAL 5013 Cobalt Blue	RAL 9005 Jet Black
RAL 6019 Pastel Green	RAL 1016 Sulphur Yellow	RAL 2004 Brilliant Orange	RAL 3020 Traffic Red	RAL 4010 Telemagenta

Cast Iron & Tubular Steel: £30 per section surcharge for Kartell Kolours.

K-Flats & K-Rads: price on application for Kartell Kolours.

Other colours only available upon request. Please contact the sales office for pricing.

Please note that while the printed colours in this publication are a good reflection, they may not be an exact match to the finished products. All finishes are gloss.

K•RAD

KOMPACT PANEL RADIATORS

The Kartell K-Rad Kollektion of radiators will enhance any home with space saving classic elegance and efficiency. Comprising over 210 sizes, they are manufactured using the latest state-of-the art technology ensuring maximum efficiency.



Securely fitted top grille



Double panel



Single panel



SIZES	MATERIAL	COLOUR	PRESSURE TESTED TO	GUARANTEE
210+	STEEL	9016	13 BAR	10 YEARS

Internally welded with a final coating of white enamel (RAL9016) each radiator is degreased and zinc phosphated before being coated with water-based cathophoratic paint. The final coat is applied using an epoxy polyester electrostatic powder coating system that is baked to a hard finish.

You also have the protection of our 'Kartell No Quibble Guarantee' against faulty manufacture which lasts for 10 years. All radiators come complete with factory fitted top grille and side panels.



Extended range of sizes to fit application



Complete with fixing kit



CONNECTIONS

Each K-RAD Kompact radiator has 4 x 3/4" connections as standard. 3/4" valve adaptors are available, which provides a 3/4" inch connector option to the valve without reducing performance.

INSTALLATION

Everything required for installation can be found within the robust packaging.

APPLICATIONS

K-RAD radiators are suitable for two pipe installations. For single pipe applications, it is advisable to use diversion tees in the pipework, as this will assist in obtaining design performance from the radiators.

Brackets are of a strong design, with open top and deep slots, which facilitates easy and secure installation. Plastic inserts seat the radiator precisely on the bracket minimizing expansion and contraction noise.

The neat nickel-plated plug and vent provide a watertight joint, whilst complementing the superior finish.

TYPE 11



See page 10 for detailed specs and sizes

TYPE 21



See page 12 for detailed specs and sizes

TYPE 22



See page 14 for detailed specs and sizes

K•RAD**KOMPACT TYPE 11****STANDARD PRODUCT RANGE**

Other sizes
are available* -
special order
only.

	TYPE 11							
	Code	Width (mm) (w)	Weight Kg/M	Water Content L/M	Output $\Delta T50^\circ$		Output $\Delta T60^\circ$	
					Watts	BTUs	Watts	BTUs
300 Series Height (h): 300mm	S304K	400	3.79	0.68	209	714	268	914
	S305K	500	4.74	0.85	262	892	335	1143
	S306K	600	5.68	1.02	314	1071	402	1372
	S308K	800	7.58	1.36	366	1249	469	1600
	S310K	1000	9.47	1.70	523	1784	670	2286
	S312K	1200	11.36	2.04	628	2141	804	2743
	S314K	1400	13.26	2.38	732	2498	938	3201
	S316K	1600	15.15	2.72	837	2855	1072	3658
	S320K	2000	18.94	3.40	1046	3569	1340	4572

400 Series Height (h): 400mm	S404K	400	4.79	0.84	270	921	346	1180
	S405K	500	5.99	1.05	337	1151	432	1475
	S406K	600	7.18	1.26	405	1381	519	1769
	S407K	700	8.38	1.47	472	1611	605	2064
	S408K	800	9.58	1.68	540	1842	691	2359
	S409K	900	10.77	1.89	607	2072	778	2654
	S410K	1000	11.97	2.10	675	2302	864	2949
	S411K	1100	13.17	2.31	742	2532	951	3244
	S412K	1200	14.36	2.52	810	2762	1037	3539
	S414K	1400	16.76	2.94	945	3223	1210	4129
	S416K	1600	19.15	3.36	1079	3683	1383	4718
	S418K	1800	21.55	3.78	1214	4144	1556	5308
	S420K	2000	23.94	4.20	1349	4604	1729	5898
	S422K	2200	26.33	4.62	1484	5064	1902	6488
	S427K	2700	32.32	5.67	1822	6215	2334	7962
	S430K	3000	35.91	6.30	2024	6906	2593	8847


500 Series Height (h): 500mm	S504K	400	6.03	1.00	326	1114	418	1427
	S505K	500	7.54	1.25	408	1392	523	1783
	S506K	600	9.04	1.50	490	1670	627	2140
	S507K	700	10.55	1.75	571	1949	732	2496
	S508K	800	12.06	2.00	653	2227	836	2853
	S509K	900	13.56	2.25	734	2505	941	3210
	S510K	1000	15.07	2.50	816	2784	1045	3566
	S511K	1100	16.58	2.75	897	3062	1150	3923
	S512K	1200	18.08	3.00	979	3341	1254	4280
	S513K	1300	19.59	3.25	1061	3619	1359	4636
	S514K	1400	21.10	3.50	1142	3897	1463	4993
	S515K	1500	22.61	3.75	1224	4176	1568	5349
	S516K	1600	24.11	4.00	1305	4454	1672	5706
	S518K	1800	27.13	4.50	1469	5011	1881	6419
	S520K	2000	30.14	5.00	1632	5568	2090	7133
	S522K	2200	33.15	5.50	1795	6124	2099	7846
	S524K	2400	36.17	6.00	1958	6682	2508	8558
	S527K	2700	40.69	6.75	2203	7516	2822	9629
	S530K	3000	45.21	7.50	2448	8351	3136	10699

	TYPE 11							
	Code	Width (mm) (w)	Weight Kg/M	Water Content L/M	Output $\Delta T50^\circ$		Output $\Delta T60^\circ$	
					Watts	BTUs	Watts	BTUs
600 Series Height (h): 600mm	S604K	400	7.35	1.16	380	1296	487	1661
	S605K	500	9.19	1.45	475	1620	608	2076
	S606K	600	11.02	1.74	570	1944	730	2491
	S607K	700	12.86	2.03	665	2268	852	2906
	S608K	800	14.70	2.32	760	2592	973	3321
	S609K	900	16.53	2.61	855	2917	1095	3736
	S610K	1000	18.37	2.90	950	3241	1217	4152
	S611K	1100	20.21	3.19	1045	3565	1338	4567
	S612K	1200	22.04	3.48	1140	3889	1460	4982
	S613K	1300	23.88	3.77	1235	4213	1582	5397
	S614K	1400	25.72	4.06	1330	4537	1703	5812
	S615K	1500	27.56	4.35	1425	4861	1825	6227
	S616K	1600	29.39	4.64	1520	5185	1947	6642
	S618K	1800	33.07	5.22	1710	5833	2190	7473
	S620K	2000	36.74	5.80	1900	6481	2433	8303
	S622K	2200	40.41	6.38	2089	7129	2677	9133
	S624K	2400	44.09	6.96	2280	7778	2921	9965
	S627K	2700	49.60	7.83	2564	8750	3285	11209
	S630K	3000	55.11	8.70	2849	9722	3650	12455


750 Series Height (h): 750mm	S704K	400	8.40	1.20	430	1468	551	1880
	S705K	500	10.50	1.50	538	1834	689	2350
	S706K	600	12.60	1.80	645	2201	827	2820
	S708K	800	16.80	2.40	860	2935	1102	3760
	S710K	1000	21.00	3.00	1075	3669	1378	4700
	S712K	1200	25.20	3.60	1290	4403	1653	5640
	S714K	1400	29.40	4.20	1505	5136	1929	6580
	S716K	1600	33.60	4.80	1720	5870	2204	7520
	S718K	1800	37.80	5.40	1936	6604	2480	8460

900 Series Height (h): 900mm	S904K	400	11.11	1.40	520	1773	666	2271
	S905K	500	13.89	1.75	649	2216	832	2839
	S906K	600	16.66	2.10	779	2659	998	3407
	S907K	700	19.44	2.45	909	3102	1165	3974
	S908K	800	22.22	2.80	1039	3545	1331	4542
	S909K	900	24.99	3.15	1169	3989	1498	5110

Heat output $\Delta T50^\circ\text{C}$ = mean water temperature of 70°C and room temperature of 20°C .
Heat output $\Delta T60^\circ\text{C}$ = mean water temperature of 80°C and room temperature 20°C .
*Other sizes are available in 100mm increments - special order only.

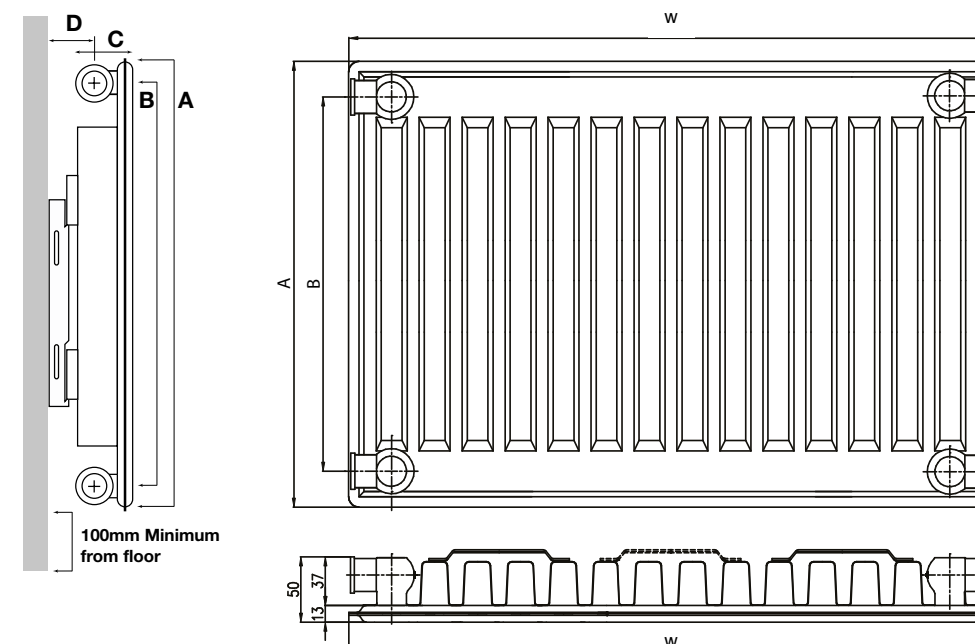FITTING DIMENSIONS

Nominal Size (mm) (A)	Centre Distance (mm) (B)	Width (mm) (C)	Wall to Centre (mm) (D)
300	245	56	40 or 55
400	345	56	40 or 55
500	445	56	40 or 55
600	545	56	40 or 55
750	695	56	40 or 55
900	845	56	40 or 55

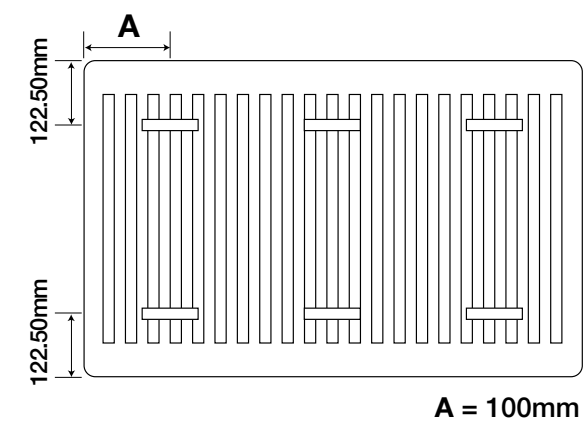K-RAD BRACKET DETAILS

FOR MORE
HEAT OUTPUT
OPTIONS

SEE PAGE
17

K•RAD

KOMPACT TYPE 21

STANDARD PRODUCT RANGE

400 Series
Height (h): 400mm

TYPE 21								
Code	Width (mm) (w)	Weight Kg/M	Water Content Lt/M	Output ΔT50°		Output ΔT60°		
				Watts	BTUs	Watts	BTUs	
P404K	400	7.60	1.67	413	1408	529	1803	
P405K	500	9.50	2.09	516	1759	661	2254	
P406K	600	11.39	2.50	619	2111	793	2705	
P407K	700	13.29	2.92	722	2463	925	3156	
P408K	800	15.19	3.34	825	2815	1057	3607	
P409K	900	17.09	3.75	928	3167	1189	4057	
P410K	1000	18.99	4.17	1031	3519	1321	4508	
P411K	1100	20.89	4.59	1134	3871	1453	4959	
P412K	1200	22.79	5.00	1238	4223	1586	5410	
P414K	1400	26.59	5.84	1444	4927	1850	6311	
P416K	1600	30.38	6.67	1650	5630	2114	7213	
P418K	1800	34.18	7.51	1856	6334	2378	8115	
P420K	2000	37.98	8.34	2063	7038	2643	9016	
P422K	2200	41.78	9.17	2269	7742	2907	9918	

500 Series
Height (h): 500mm

P504K	400	9.27	1.97	493	1682	631	2154	
P505K	500	11.59	2.47	616	2102	789	2693	
P506K	600	13.90	2.96	739	2523	947	3232	
P507K	700	16.22	3.45	863	2943	1105	3770	
P508K	800	18.54	3.94	986	3363	1263	4309	
P509K	900	20.85	4.44	1109	3784	1421	4847	
P510K	1000	23.17	4.93	1232	4204	1579	5386	
P511K	1100	25.49	5.42	1355	4625	1736	5925	
P512K	1200	27.80	5.92	1479	5045	1894	6463	
P514K	1400	32.44	6.90	1725	5886	2210	7540	
P516K	1600	37.07	7.89	1972	6727	2526	8618	
P518K	1800	41.71	8.87	2218	7568	2841	9695	
P520K	2000	46.34	9.86	2464	8408	3157	10772	
P522K	2200	50.97	10.85	2711	9249	3473	11849	

600 Series
Height (h): 600mm

TYPE 21								
Code	Width (mm) (w)	Weight Kg/M	Water Content Lt/M	Output ΔT50°		Output ΔT60°		
				Watts	BTUs	Watts	BTUs	
P604K	400	11.43	2.28	566	1932	725	2474	
P605K	500	14.29	2.85	708	2414	907	3093	
P606K	600	17.14	3.42	849	2897	1088	3712	
P607K	700	20.00	3.99	991	3380	1269	4330	
P608K	800	22.86	4.56	1132	3863	1450	4949	
P609K	900	25.71	5.13	1274	4346	1632	5568	
P610K	1000	28.57	5.70	1415	4829	1813	6186	
P611K	1100	31.43	6.27	1557	5312	1994	6805	
P612K	1200	34.28	6.84	1698	5795	2176	7423	
P613K	1300	37.14	7.41	1840	6277	2357	8042	
P614K	1400	40.00	7.98	1981	6760	2538	8661	
P615K	1500	42.86	8.55	2123	7243	2720	9279	
P616K	1600	45.71	9.12	2264	7726	2901	9898	
P618K	1800	51.43	10.26	2547	8692	3264	11135	
P620K	2000	57.14	11.40	2830	9658	3626	12372	
P622K	2200	62.85	12.54	3114	10623	3989	13610	

750 Series
Height (h): 750mm

P704K	400	14.40	2.68	650	2216	832	2839	
P705K	500	18.00	3.35	812	2771	1040	3549	
P706K	600	21.60	4.02	974	3325	1248	4259	
P708K	800	28.80	5.36	1299	4433	1664	5679	
P710K	1000	36.00	6.70	1624	5541	2081	7099	


900 Series
Height (h): 900mm

P904K	400	16.99	3.08	752	2567	964	3289	
P905K	500	21.24	3.85	941	3209	1205	4111	
P906K	600	25.48	4.62	1129	3851	1446	4934	
P907K	700	29.73	5.39	1317	4493	1687	5756	
P908K	800	33.98	6.16	1505	5135	1928	6578	
P909K	900	38.22	6.93	1693	5777	2169	7400	

Heat output ΔT50°C = mean water temperature of 70°C and room temperature of 20°C.
Heat output ΔT60°C = mean water temperature of 80°C and room temperature 20°C.
*Other sizes are available in 100mm increments - special order only.

Other sizes
are available* -
special order
only.


FITTING DIMENSIONS

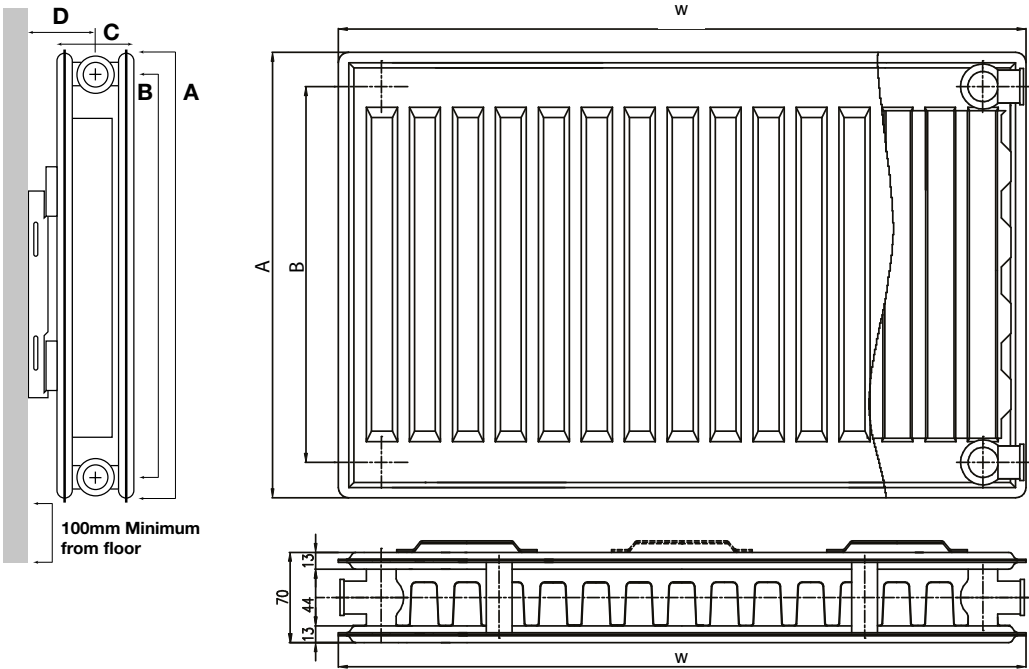

Nominal Size (mm) (A)	Centre Distance (mm) (B)	Width (mm) (C)	Wall to Centre (mm) (D)
300	245	70	65 or 80
400	345	70	65 or 80
500	445	70	65 or 80
600	545	70	65 or 80
750	695	70	65 or 80
900	845	70	65 or 80

FOR MORE
HEAT OUTPUT
OPTIONS
SEE PAGE
18

K-RAD BRACKET DETAILS

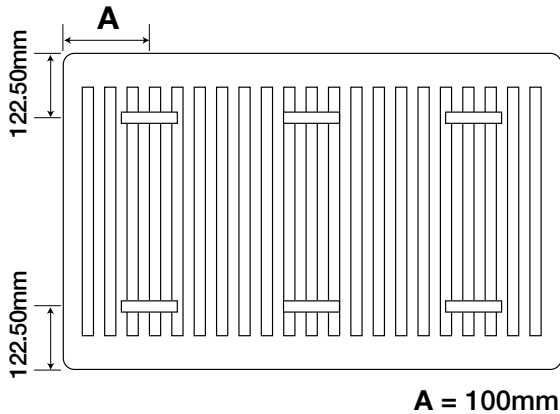



KOMPACT TYPE 22

STANDARD PRODUCT RANGE

Other sizes
are available* -
special order
only.

300 Series
Height (h):
300mm

TYPE 22							
Code	Width (mm) (w)	Weight Kg/M	Water Content Lt/M	Output $\Delta T50^\circ$		Output $\Delta T60^\circ$	
				Watts	BTUs	Watts	BTUs
D304K	400	6.79	1.28	420	1432	538	1834
D306K	600	10.18	1.92	629	2148	806	2752
D308K	800	13.58	2.56	839	2864	1075	3669
D310K	1000	16.97	3.20	1049	3580	1344	4586
D312K	1200	20.36	3.84	1259	4296	1613	5503
D314K	1400	23.76	4.48	1469	5012	1882	6420
D316K	1600	27.15	5.12	1679	5727	2150	7337
D320K	2000	33.94	6.40	2098	7159	2688	9172

400 Series
Height (h):
400mm

D404K	400	8.43	1.64	533	1819	683	2330
D405K	500	10.54	2.05	666	2273	854	2912
D406K	600	12.64	2.46	800	2728	1024	3495
D407K	700	14.75	2.87	933	3183	1195	4077
D408K	800	16.86	3.28	1066	3637	1366	4660
D409K	900	18.96	3.69	1199	4092	1536	5242
D410K	1000	21.07	4.10	1333	4547	1707	5825
D411K	1100	23.18	4.51	1466	5002	1878	6407
D412K	1200	25.28	4.92	1599	5456	2049	6990
D414K	1400	29.50	5.74	1866	6366	2390	8155
D416K	1600	33.71	6.56	2132	7275	2732	9320
D418K	1800	37.93	7.38	2399	8184	3070	10485
D420K	2000	42.14	8.20	2665	9094	3414	11650
D422K	2200	46.35	9.02	2932	10003	3756	12815

500 Series
Height (h):
500mm

D504K	400	10.42	2.00	638	2176	817	2787
D505K	500	13.03	2.50	797	2720	1021	3484
D506K	600	15.64	3.00	956	3263	1225	4181
D507K	700	18.24	3.50	1116	3807	1430	4878
D508K	800	20.85	4.00	1275	4351	1634	5574
D509K	900	23.45	4.50	1435	4895	1838	6271
D510K	1000	26.06	5.00	1594	5439	2042	6968
D511K	1100	28.67	5.50	1754	5983	2246	7665
D512K	1200	31.27	6.00	1913	6527	2451	8362
D513K	1300	33.88	6.50	2072	7071	2655	9058
D514K	1400	36.48	7.00	2232	7615	2859	9755
D515K	1500	39.09	7.50	2391	8159	3063	10452
D516K	1600	41.70	8.00	2551	8703	3268	11149
D518K	1800	46.91	9.00	2869	9790	3676	12542
D520K	2000	52.12	10.00	3188	10878	4084	13936
D522K	2200	57.33	11.00	3507	11966	4493	15330
D524K	2400	62.54	12.00	3826	13054	4901	16723

600 Series
Height (h):
600mm

TYPE 22							
Code	Width (mm) (w)	Weight Kg/M	Water Content Lt/M	Output $\Delta T50^\circ$		Output $\Delta T60^\circ$	
				Watts	BTUs	Watts	BTUs
D604K	400	12.55	2.36	734	2504	940	3208
D605K	500	15.69	2.95	917	3130	1175	4010
D606K	600	18.82	3.54	1101	3756	1410	4812
D607K	700	21.96	4.13	1284	4382	1645	5614
D608K	800	25.10	4.72	1468	5008	1880	6416
D609K	900	28.23	5.31	1651	5634	2115	7218
D610K	1000	31.37	5.90	1835	6260	2350	8020
D611K	1100	34.51	6.49	2018	6886	2585	8822
D612K	1200	37.64	7.08	2202	7512	2820	9624
D613K	1300	40.78	7.67	2385	8138	3056	10425
D614K	1400	43.92	8.26	2569	8764	3291	11227
D615K	1500	47.06	8.85	2752	9390	3526	12029
D616K	1600	50.19	9.44	2935	10016	3761	12831
D618K	1800	56.47	10.62	3302	11268	4231	14435
D620K	2000	62.74	11.80	3669	12520	4701	16039
D622K	2200	69.01	12.98	4036	13772	5171	17643
D624K	2400	75.29	14.16	4404	15240	5640	19248
D627K	2700	84.70	15.93	4954	16902	6346	21653
D630K	3000	94.11	17.70	5504	18780	7051	24059

750 Series
Height (h):
750mm


D704K	400	16.80	2.70	830	2832	1063	3628
D705K	500	21.00	3.38	1038	3540	1329	4536
D706K	600	25.20	4.05	1245	4248	1595	5443
D708K	800	33.60	5.40	1660	5665	2127	7257
D710K	1000	42.00	6.75	2075	7081	2659	9071
D712K	1200	50.40	8.10	2490	8497	3190	10885
D714K	1400	58.80	9.45	2905	9913	3722	12700
D716K	1600	67.20	10.80	3320	11329	4254	14514

900 Series
Height (h):
900mm

D904K	400	18.92	3.04	908	3344	1255	4284
D905K	500	23.65	3.80	1225	4180	1569	5355
D906K	600	28.38	4.56	1470	5016	1883	6426
D907K	700	33.11	5.32	1715	5852	2197	7496
D908K	800	37.84	6.08	1960	6688	2511	8567
D909K	900	42.57	6.84	2205	7523	2825	9638
D910K	1000	47.30	7.60	2450	8359	3139	10709
D911K	1100	52.03	8.36	2695	9195	3453	11780
D912K	1200	56.76	9.12	2940	10031	3766	12851


Heat output $\Delta T50^\circ\text{C}$ = mean water temperature of 70°C and room temperature of 20°C .
Heat output $\Delta T60^\circ\text{C}$ = mean water temperature of 80°C and room temperature 20°C .
*Other sizes are available in 100mm increments - special order only.

FITTING DIMENSIONS

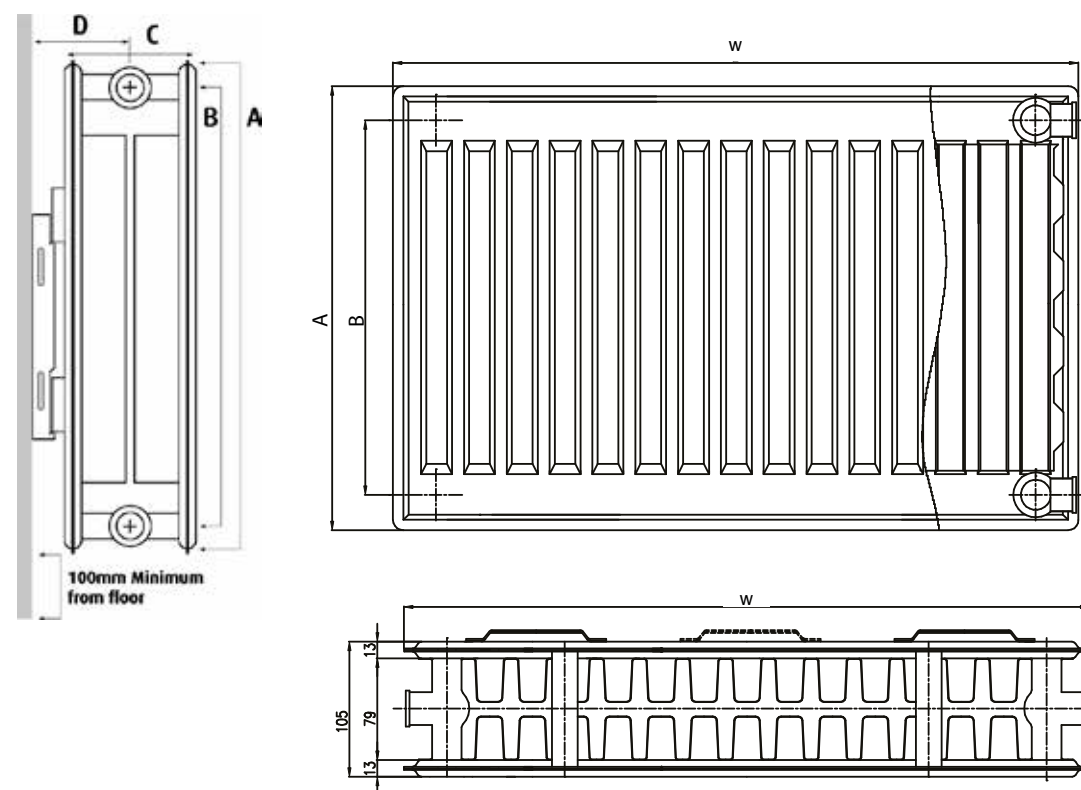

Nominal Size (mm) (A)	Centre Distance (mm) (B)	Width (mm) (C)	Wall to Centre (mm) (D)
300	245	105	82.5 or 97.5
400	345	105	82.5 or 97.5
500	445	105	82.5 or 97.5
600	545	105	82.5 or 97.5
750	695	105	82.5 or 97.5
900	845	105	82.5 or 97.5

K-RAD BRACKET DETAILS

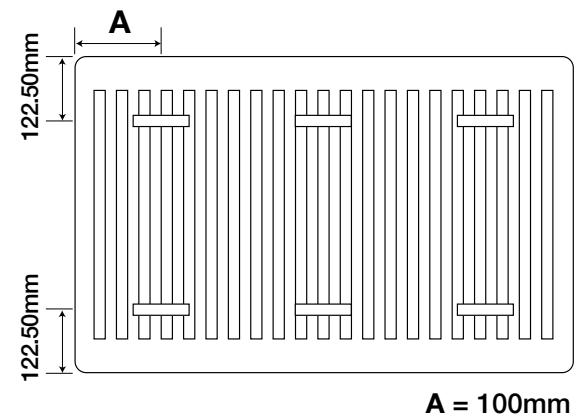

A = 100mm




FOR MORE
HEAT OUTPUT
OPTIONS

SEE PAGE
19



KOMPACT TYPE 33

STANDARD PRODUCT RANGE

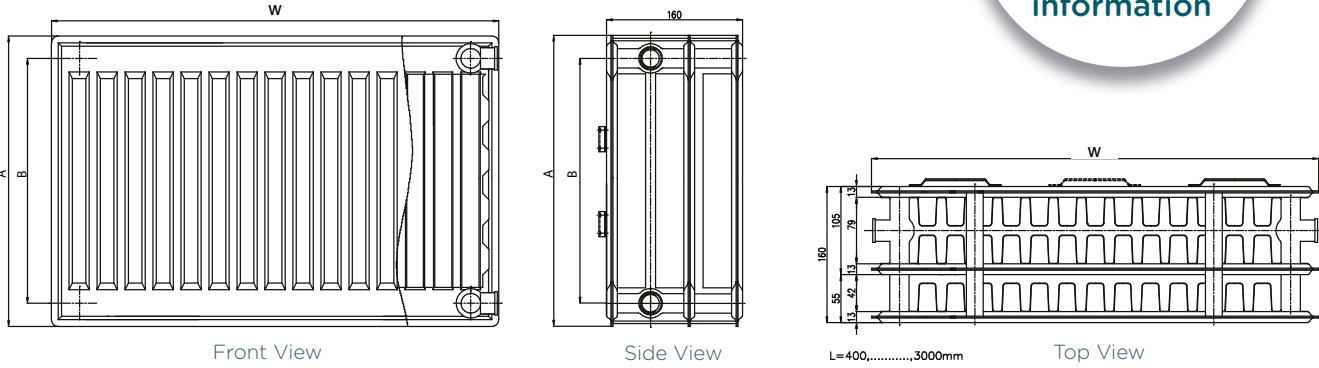

Other sizes
are available*
- contact sales
office for more
information

Heat output $\Delta T30^{\circ}C$ - These outputs indicate radiator performance when using a Geo-Therm appliance (Flow Temperature $55^{\circ}C$ / Return Temperature $45^{\circ}C$ / Room Temperature $20^{\circ}C$)

Heat output $\Delta T42.5^{\circ}C$ - These outputs indicate radiator performance when using a Geo-Therm appliance (Flow Temperature $70^{\circ}C$ / Return Temperature $55^{\circ}C$ / Room Temperature $20^{\circ}C$)

Heat output $\Delta T50^{\circ}C$ - These outputs indicate radiator performance when using a condensing / HE appliance (Flow Temperature $75^{\circ}C$ / Return Temperature $65^{\circ}C$ / Room Temperature $20^{\circ}C$)

Heat output $\Delta T60^{\circ}C$ - These outputs indicate radiator performance when using a non-condensing / SE appliance (Flow Temperature $90^{\circ}C$ / Return Temperature $70^{\circ}C$ / Room Temperature $20^{\circ}C$)

Width	Height		300				400				500				600				750				900			
	Mean Temperature*		Heat Output				Heat Output				Heat Output				Heat Output				Heat Output				Heat Output			
	ΔT	$^{\circ}C$	Watt	Kcal/h	BTU	Watt	Kcal/h	BTU	Watt	Kcal/h	BTU	Watt	Kcal/h	BTU	Watt	Kcal/h	BTU	Watt	Kcal/h	BTU	Watt	Kcal/h	BTU	Watt	Kcal/h	BTU
400	30	55/45/20	294	253	1005	374	322	1275	448	385	1528	517	445	1765	666	573	2274	703	605	2399						
	42.5	70/55/20	461	397	1574	586	504	1999	702	604	2394	811	698	2766	769	662	2625	1102	948	3760						
	50	75/65/20	572	493	1953	726	625	2478	870	749	2970	1006	865	3431	1194	1027	4073	1367	1176	4664						
	60	90/70/20	724	623	2472	920	791	3138	1102	948	3759	1273	1095	4343	1530	1317	5220	1730	1489	5903						
600	30	55/45/20	442	380	1507	561	483	1913	672	578	2292	776	668	2648	1000	860	3411	1055	908	3599						
	42.5	70/55/20	692	596	2361	879	756	2998	1052	906	3591	1216	1047	4149	1154	993	3937	1653	1422	5640						
	50	75/65/20	859	739	2930	1090	938	3718	1306	1124	4455	1508	1298	5147	1790	1541	6109	2050	1764	6995						
	60	90/70/20	1087	935	3707	1379	1187	4707	1652	1422	5638	1909	1643	6514	2295	1975	7831	2595	2233	8854						
800	30	55/45/20	589	507	2009	748	643	2551	896	771	3056	1035	891	3531	1333	1147	4548	1407	1210	4799						
	42.5	70/55/20	923	794	3149	1171	1008	3997	1403	1208	4788	1621	1395	5532	1538	1324	5249	2204	1897	7519						
	50	75/65/20	1145	985	3906	1453	1250	4957	1741	1498	5940	2011	1731	6862	2387	2054	8145	2734	2352	9327						
	60	90/70/20	1449	1247	4943	1839	1583	6275	2203	1896	7517	2546	2191	8686	3060	2633	10441	3460	2978	11806						
1000	30	55/45/20	736	634	2512	935	804	3189	1120	963	3820	1293	1113	4413	1666	1434	5684	1758	1513	5999						
	42.5	70/55/20	1154	993	3936	1464	1260	4996	1754	1510	5985	2027	1744	6915	1923	1655	6561	2755	2371	9399						
	50	75/65/20	1431	1231	4883	1816	1563	6196	2216	1873	7425	2514	2164	8578	2984	2568	10181	3417	2941	11659						
	60	90/70/20	1811	1559	6179	2299	1978	7844	2754	2370	9397	3182	2738	10857	3825	3292	13051	4325	3722	14757						
1200	30	55/45/20	883	760	3014	1121	965	3826	1343	1156	4584	1552	1336	5296	1999	1720	6821	2110	1816	7198						
	42.5	70/55/20	1384	1191	4723	1757	1512	5996	2105	1812	7182	2432	2093	8298	2308	1986	7874	3306	2845	11279						
	50	75/65/20	1717	1478	5859	2179	1875	7435	2611	2247	8909	3017	2596	10293	3581	3082	12218	4100	3529	13991						
	60	90/70/20	2173	1870	7415	2759	2374	9413	3305	2844	11276	3818	3286	13028	4590	3950	15661	5190	4466	17708						
1400	30	55/45/20	1031	887	3517	1308	1126	4464	1567	1349	5348	1811	1558	6179	2332	2007	7958	2461	2118	8398						
	42.5	70/55/20	1615	1390	5510	2050	1764	6995	2456	2113	8379	2837	2442	9681	2692	2317	9186	3857	3319	13159						
	50	75/65/20	2003	1724	6836	2542	2188	8675	3046	2622	10394	3520	3029	12009	4178	3595	14254	4784	4117	16322						
	60	90/70/20	2535	2182	8651	3219	2770	10982	3856	3318	13155	4455	3834	15200	5355	4608	18271	6055	5211	20660						
1600	30	55/45/20	1178	1014	4019	1495	1287	5102	1791	1541	6112	2070	1781	7061	2666	2294	9095	2813	2421	9598						
	42.5	70/55/20	1846	1588	6297	2343	2016	7994	2807	2415	9576	3243	2791	11064	3077	2648	10498	4408	3793	15039						
	50	75/65/20	2290	1970	7812	2906	2501	9914	3482	2996	11879	4022	3462	13724	4774	4109	16290	5467	4705	18654						
	60	90/70/20	2898	2494	9887	3678	3166	12551	4406	3792	15035	5091	4381	17371	6120	5267	20881	6920	5955	23611						
1800	30	55/45/20	1325	1140	4521	1682	1448	5740	2015	1734	6876	2328	2004	7944	2999	2581	10232	3165	2723	10798						
	42.5	70/55/20	2076	1787	7084	2636	2268	8993	3157	2717	10773	3648	3140	12447	3461	2979	11810	4959	4267	16919						
	50	75/65/20	2576	2217	8789	3269	2813	11153	3917	3371	13364	4525	3894	15440	5371	4622	18327	6151	5293	20986						
	60	90/70/20	3260	2805	11122	4138	3561	14120	4957	4266	16914	5728	4929	19543	6885	5925	23492	7785	6700	26562						
2000	30	55/45/20	1472	1267	5024	1869	1609	6377	2239	1927	7640	2587	2226	8827	3332	2867	11369	3516	3026	11997						
	42.5	70/55/20	2307	1985	7872	2929	2520	9993	3508	3019	11970	4054	3488	13831	3846	3310	13123	5510	4741	18799						
	50	75/65/20	2862	2463	9765	3632	3126	12392	4352	3745	14849	5028	4327	17156	5968	5136	20363	6834	5881	23318						
	60	90/70/20	3622	3117	12358	4598	3957	15688	5508	4740	18793	6364	5477	21714	7650	6583	26102	8650	7444	29514						

For all lengths and 20°C room temperature. * Mean temperature - the water inlet and outlet temperatures and a room temperature of 20°C

KOMPACT TYPE 11

ADDITIONAL HEAT OUTPUT OPTIONS

Heat output $\Delta T30^{\circ}C$ - These outputs indicate radiator performance when using a Geo-Therm appliance (Flow Temperature $55^{\circ}C$ / Return Temperature $45^{\circ}C$ / Room Temperature $20^{\circ}C$)

Heat output $\Delta T42.5^{\circ}C$ - These outputs indicate radiator performance when using a Geo-Therm appliance (Flow Temperature $70^{\circ}C$ / Return Temperature $55^{\circ}C$ / Room Temperature $20^{\circ}C$)

Heat output $\Delta T50^{\circ}C$ - These outputs indicate radiator performance when using a condensing / HE appliance (Flow Temperature $75^{\circ}C$ / Return Temperature $65^{\circ}C$ / Room Temperature $20^{\circ}C$)

Heat output $\Delta T60^{\circ}C$ - These outputs indicate radiator performance when using a non-condensing / SE appliance (Flow Temperature $90^{\circ}C$ / Return Temperature $70^{\circ}C$ / Room Temperature $20^{\circ}C$)

Width		Height		300			400			500			600			750			900		
		Mean Temperature*		Heat Output			Heat Output			Heat Output			Heat Output			Heat Output			Heat Output		
		ΔT	°C	Watt	Kcal/h	BTU	Watt	Kcal/h	BTU	Watt	Kcal/h	BTU	Watt	Kcal/h	BTU	Watt	Kcal/h	BTU	Watt	Kcal/h	BTU
400	30	55/45/20	109	94	372	140	121	479	170	146	580	198	170	675	246	212	841	271	233	923	
	42.5	70/55/20	171	147	582	220	189	751	266	229	908	310	267	1058	284	245	970	424	365	1447	
	50	75/65/20	209	180	714	270	232	921	326	281	1114	380	327	1297	430	370	1467	519	447	1772	
	60	90/70/20	268	231	914	346	297	1179	418	360	1426	487	419	1661	551	474	1881	666	573	2271	
500	30	55/45/20	136	117	465	176	151	599	212	183	725	247	213	844	308	265	1051	338	291	1154	
	42.5	70/55/20	213	184	728	275	237	939	333	286	1136	388	334	1322	356	306	1213	530	456	1808	
	50	75/65/20	262	225	892	338	290	1152	408	351	1392	475	409	1621	538	463	1834	649	559	2214	
	60	90/70/20	335	288	1143	432	372	1474	523	450	1783	609	524	2076	689	593	2351	832	716	2839	
600	30	55/45/20	163	141	558	211	181	719	255	219	870	297	255	1013	370	318	1261	406	349	1385	
	42.5	70/55/20	256	220	874	330	284	1127	399	344	1363	465	400	1587	427	367	1456	636	547	2170	
	50	75/65/20	314	270	1071	405	349	1382	490	421	1671	570	491	1945	645	555	2201	779	670	2655	
	60	90/70/20	402	346	1372	518	446	1769	627	540	2139	730	628	2491	827	712	2821	998	859	3407	
700	30	55/45/20	191	164	650	246	212	839	297	256	1015	346	298	1182	431	371	1471	473	407	1616	
	42.5	70/55/20	299	257	1019	385	332	1314	466	401	1590	543	467	1851	498	428	1698	742	638	2531	
	50	75/65/20	366	315	1249	473	407	1612	571	492	1949	665	572	2269	753	648	2568	909	782	3100	
	60	90/70/20	469	404	1600	605	520	2064	732	630	2496	852	733	2907	965	830	3291	1165	1002	3974	
800	30	55/45/20	218	188	743	281	242	959	340	292	1160	396	341	1350	493	424	1681	541	466	1846	
	42.5	70/55/20	341	294	1165	440	379	1502	532	458	1817	620	534	2116	569	490	1941	848	730	2893	
	50	75/65/20	418	360	1428	540	465	1842	653	562	2227	760	654	2593	860	740	2934	1038	894	3543	
	60	90/70/20	536	461	1829	691	595	2358	836	719	2852	974	838	3322	1102	949	3761	1331	1146	4542	
900	30	55/45/20	245	211	836	316	272	1079	382	329	1304	445	383	1519	554	477	1892	609	524	2077	
	42.5	70/55/20	384	331	1310	495	426	1690	599	516	2044	698	600	2380	640	551	2183	954	821	3255	
	50	75/65/20	471	405	1606	608	523	2073	734	632	2506	855	736	2917	968	833	3301	1168	1005	3986	
	60	90/70/20	603	519	2057	778	669	2653	941	809	3209	1095	943	3737	1240	1067	4232	1498	1289	5110	
1000	30	55/45/20	272	234	929	350	302	1198	425	366	1449	495	426	1688	616	530	2102	676	582	2308	
	42.5	70/55/20	427	367	1456	551	474	1878	666	573	2271	775	667	2645	711	612	2426	1060	912	3616	
	50	75/65/20	523	450	1784	675	581	2303	816	702	2784	950	818	3241	1103	949	3763	1298	1117	4429	
	60	90/70/20	670	577	2286	864	744	2948	1045	899	3566	1217	1047	4152	1414	1217	4825	1664	1432	5678	
1100	30	55/45/20	300	258	1022	386	332	1318	467	402	1594	544	468	1857	678	583	2312	744	640	2539	
	42.5	70/55/20	469	404	1602	605	521	2065	732	630	2498	853	734	2909	782	673	2669	1166	1003	3978	
	50	75/65/20	575	495	1963	743	639	2533	898	772	3063	1045	899	3566	1183	1018	4035	1428	1229	4872	
	60	90/70/20	737	634	2515	950	818	3243	1150	989	3922	1339	1152	4568	1516	1304	5172	1830	1575	6245	
1200	30	55/45/20	327	281	1115	421	363	1438	510	439	1739	594	511	2026	739	636	2522	812	699	2770	
	42.5	70/55/20	512	441	1747	660	568	2253	799	687	2725	930	801	3174	853	734	2911	1272	1095	4340	
	50	75/65/20	628	540	2141	810	697	2764	979	843	3341	1140	981	3890	1290	1110	4401	1558	1340	5315	
	60	90/70/20	804	692	2743	1037	892	3538	1254	1079	4279	1460	1257	4983	1654	1423	5642	1997	1718	6813	
1300	30	55/45/20	354	305	1208	457	393	1558	552	475	1884	643	553	2194	801	689	2732	879	757	3000	
	42.5	70/55/20	555	477	1893	715	616	2441	865	745	2952	1008	867	3438	924	795	3154	1378	1186	4701	
	50	75/65/20	680	585	2320	878	755	2994	1061	913	3619	1235	1063	4214	1398	1203	4768	1687	1452	5757	
	60	90/70/20	871	750	2972	1123	967	3832	1359	1169	4635	1582	1362	5398	1791	1542	6112	2163	1862	7381	
1400	30	55/45/20	381	328	1301	492	423	1678	595	512	2029	693	596	2363	862	742	2943	947	815	3231	
	42.5	70/55/20	597	514	2039	770	663	2629	932	802	3179	1085	934	3703	995	857	3396	1484	1277	5063	
	50	75/65/20	732	630	2498	945	813	3224	1142	983	3998	1330	1145	4538	1505	1295	5135	1817	1564	6200	
	60	90/70/20	938	807	3200	1210	1041	4127	1463	1259	4992	1704	1466	5813	1929	1660	6582	2330	2005	7949	
1500	30	55/45/20	409	352	1394	527	453	1798	637	548	2174	742	639	2532	924	795	3153	1015	873	3462	
	42.5	70/55/20	640	551	2184	825	710	2817	998	859	3407	1163	1001	3967	1067	918	3639	1590	1368	5424	
	50	75/65/20	785	675	2677	1013	871	3455	1224	1053	4176	1425	1226	4862	1613	1388	5502	1947	1676	6643	
	60	90/70/20	1005	865	3429	1296	1115	4422	1568	1349	5348	1826	1571	6229	2067	1779	7053	2496	2148	8516	
1600	30	55/45/20	436	375	1487	562	484	1917	680	585	2319	792	681	2701	986	848	3363	1082	931	3693	
	42.5	70/55/20	683	588	2330	881	758	3004	1065	916	3634	1240	1067	4232	1158	979	3881	1696	1459	5786	
	50	75/65/20	837	720	2855	1080	929	3685	1306	1124	4455	1520	1308	5186	1720	1480	5869	2077	1787	7086	
	60	90/70/20	1072	923	3658	1382	1190	4717	1672	1439	5705	1947	1676	6644	2205	1897	7523	2662	2291	9084	
1800	30	55/45/20	490	422	1673	632	544	2157	765	658	2609	890	766	3038	1109	954	3783	1218	1048	4154	
	42.5	70/55/20	768	661	2621	991	852	3380	1198	1031	4088	1395	1201	4761	1280	1101	4367	1908	1642	6509	
	50	75/65/20	941	810	3212	1215	1046	4146	1469	1264	5012	1710	1472	5835	1935	1665	6602	2336	2011	7972	
	60	90/70/20	1206	1038	4115	1555	1338	5306	1881	1619	6418	2191	1885	7474	2480	2135	8463	2995	2578	10220	
2000	30	55/45/20	545	469	1859	702	605	2397	850	731	2899	989	851	3376	1232	1060	4204	1353	1164	4616	
	42.5	70/55/20	854	735	2912	1101	947	3755	1331	1146	4542	1550	1334	5290	1422	1224	4852	2120	1824	7233	
	50	75/65/20	1046	900	3569	1350	1162	4606	1632	1404	5568	1900	1635	6483	2150	1850	7336	2596	2234	8858	
	60	90/70/20	1340	1153	4572	1728	1487	5896	2090	1799	7131	2434	2095	8305	2756	2372	9403	3328	2864	11355	
2200	30	55/45/20	599	516	2044	773	665	2636	935	804	3189	1088	937	3714	1355	1166	4624	1488	1281	5077	
	42.5	70/55/20	939	808	3203	1211	1042	4131	1464	1260	4996	1705	1468	5819	1564	1346	5337	2332	2007	7956	
	50	75/65/20	1151	990	3926	1485	1278	5067	1795	1545	6125	2090	1799	7131	2365	2035	8069	2856	2457	9743	
	60	90/70/20	1474	1269	5029	1901	1636	6486	2299	1978	7844	2677	2304	9135	3032	2609	10344	3661	3150	12491	
2400	30	55/45/20	654	563	2230	843	725	2876	1020	877	3479	1187	1022	4051	1478	1272	5044	1623	1397	5539	
	42.5	70/55/20	1024	881	3495	1321	1137	4506	1597	1375	5451	1860	1601	6348	1706	1469	5822	2544	2189	8679	
	50	75/65/20	1255	1080	4283	1620	1394	5527	1958	1685	6682	2280									

KOMPACT TYPE 21

ADDITIONAL HEAT OUTPUT OPTIONS

Heat output $\Delta T30^{\circ}\text{C}$ - These outputs indicate radiator performance when using a Geo-Therm appliance (Flow Temperature 55°C / Return Temperature 45°C / Room Temperature 20°C)

Heat output $\Delta T42.5^{\circ}\text{C}$ - These outputs indicate radiator performance when using a Geo-Therm appliance (Flow Temperature 70°C / Return Temperature 55°C / Room Temperature 20°C)

Heat output $\Delta T50^{\circ}\text{C}$ - These outputs indicate radiator performance when using a condensing / HE appliance (Flow Temperature 75°C / Return Temperature 65°C / Room Temperature 20°C)

Heat output $\Delta T60^{\circ}\text{C}$ - These outputs indicate radiator performance when using a non-condensing / SE appliance (Flow Temperature 90°C / Return Temperature 70°C / Room Temperature 20°C)

Width	Height		300			400			500			600			750			900		
	Mean Temperature*		Heat Output			Heat Output			Heat Output			Heat Output			Heat Output			Heat Output		
	ΔT	°C	Watt	Kcal/h	BTU	Watt	Kcal/h	BTU	Watt	Kcal/h	BTU	Watt	Kcal/h	BTU	Watt	Kcal/h	BTU	Watt	Kcal/h	BTU
400	30	55/45/20	160	138	546	215	185	733	257	221	876	295	254	1006	355	306	1212	392	337	1337
	42.5	70/55/20	251	216	855	337	290	1148	402	346	1373	462	398	1576	410	352	1398	614	528	2095
	50	75/65/20	311	267	1060	412	355	1407	493	424	1681	566	487	1931	650	559	2216	753	648	2569
	60	90/70/20	394	339	1343	528	455	1803	632	544	2155	725	624	2474	832	716	2840	964	830	3289
500	30	55/45/20	200	172	682	268	231	916	321	276	1095	368	317	1257	444	382	1515	490	422	1671
	42.5	70/55/20	313	270	1069	421	362	1435	503	433	1716	577	497	1970	512	441	1747	768	661	2619
	50	75/65/20	389	334	1326	516	444	1759	616	530	2102	708	609	2414	812	699	2771	941	810	3211
	60	90/70/20	492	423	1679	661	568	2254	790	679	2694	907	780	3093	1041	895	3550	1205	1037	4111
600	30	55/45/20	240	207	819	322	277	1099	385	331	1314	442	381	1509	533	459	1818	588	506	2006
	42.5	70/55/20	376	324	1283	505	434	1723	603	519	2059	693	596	2364	614	529	2096	921	793	3143
	50	75/65/20	466	401	1591	619	532	2111	739	636	2522	849	731	2897	974	839	3325	1129	972	3853
	60	90/70/20	590	508	2014	793	682	2704	947	815	3233	1088	936	3712	1249	1075	4260	1446	1244	4934
700	30	55/45/20	280	241	955	376	323	1283	449	387	1533	516	444	1760	622	535	2121	686	590	2340
	42.5	70/55/20	439	378	1497	589	507	2010	704	606	2402	808	696	2758	717	617	2446	1075	925	3666
	50	75/65/20	544	468	1856	722	621	2462	862	742	2943	991	852	3380	1137	978	3879	1317	1134	4495
	60	90/70/20	689	593	2350	925	796	3155	1105	951	3771	1269	1092	4330	1457	1254	4970	1687	1452	5756
800	30	55/45/20	320	275	1092	430	370	1466	513	442	1752	590	507	2012	710	611	2424	784	674	2674
	42.5	70/55/20	501	431	1711	673	579	2297	805	692	2745	924	795	3152	819	705	2795	1228	1057	4190
	50	75/65/20	622	535	2121	825	710	2814	986	848	3363	1132	974	3862	1299	1118	4433	1506	1296	5137
	60	90/70/20	787	677	2686	1057	909	3606	1263	1087	4310	1450	1248	4949	1665	1433	5680	1928	1659	6578
900	30	55/45/20	360	310	1228	483	416	1649	578	497	1971	663	571	2263	799	688	2727	882	759	3008
	42.5	70/55/20	564	485	1925	757	652	2584	905	779	3088	1039	894	3546	922	793	3144	1382	1189	4714
	50	75/65/20	699	602	2386	928	799	3166	1109	954	3783	1274	1096	4345	1462	1258	4987	1694	1458	5779
	60	90/70/20	886	762	3022	1189	1023	4057	1421	1223	4849	1632	1404	5567	1873	1612	6390	2169	1867	7401
1000	30	55/45/20	400	344	1365	537	462	1832	642	552	2190	737	634	2515	888	764	3030	980	843	3343
	42.5	70/55/20	627	539	2138	841	724	2871	1006	866	3432	1155	994	3940	1024	881	3494	1535	1321	5238
	50	75/65/20	777	669	2651	1031	887	3518	1232	1060	4204	1415	1218	4828	1590	1368	5425	1882	1620	6421
	60	90/70/20	984	847	3357	1321	1137	4507	1579	1359	5388	1813	1560	6186	2038	1754	6954	2410	2074	8223
1100	30	55/45/20	440	379	1501	591	508	2015	706	608	2409	811	698	2766	977	841	3333	1078	927	3677
	42.5	70/55/20	689	593	2352	926	797	3158	1106	952	3775	1270	1093	4334	1126	969	3843	1689	1453	5761
	50	75/65/20	855	736	2916	1134	976	3870	1355	1166	4624	1557	1340	5311	1786	1537	6095	2070	1782	7064
	60	90/70/20	1082	931	3693	1453	1251	4958	1737	1495	5926	1994	1716	6805	2289	1970	7810	2651	2281	9045
1200	30	55/45/20	480	413	1638	644	555	2199	770	663	2628	884	761	3018	1066	917	3636	1176	1012	4011
	42.5	70/55/20	752	647	2566	1010	869	3445	1207	1039	4118	1386	1193	4728	1229	1057	4193	1842	1585	6285
	50	75/65/20	932	802	3181	1237	1065	4221	1478	1272	5044	1698	1461	5794	1949	1677	6649	2258	1944	7706
	60	90/70/20	1181	1016	4029	1585	1364	5409	1895	1631	6465	2176	1872	7423	2497	2149	8520	2892	2489	9868
1300	30	55/45/20	520	448	1774	698	601	2382	834	718	2847	958	825	3269	1154	993	3939	1274	1096	4345
	42.5	70/55/20	815	701	2780	1094	941	3732	1307	1125	4461	1501	1292	5122	1331	1146	4542	1996	1717	6809
	50	75/65/20	1010	869	3446	1340	1153	4573	1602	1378	5465	1840	1583	6276	2111	1817	7203	2447	2106	8348
	60	90/70/20	1279	1101	4365	1717	1478	5859	2053	1767	7004	2357	2028	8042	2705	2328	9230	3133	2696	10690
1400	30	55/45/20	560	482	1911	752	647	2565	899	773	3066	1032	888	3520	1243	1070	4242	1372	1180	4680
	42.5	70/55/20	877	755	2994	1178	1014	4019	1408	1212	4804	1617	1391	5516	1434	1234	4891	2149	1849	7333
	50	75/65/20	1088	936	3712	1443	1242	4925	1725	1484	5885	1981	1705	6759	2274	1957	7758	2635	2267	8990
	60	90/70/20	1378	1186	4700	1849	1592	6310	2211	1902	7543	2538	2184	8660	2913	2507	9941	3374	2904	11512
1500	30	55/45/20	600	516	2047	805	693	2748	963	829	3285	1105	951	3772	1332	1146	4545	1470	1265	5014
	42.5	70/55/20	940	809	3208	1262	1086	4306	1509	1298	5147	1732	1491	5910	1536	1322	5241	2303	1982	7856
	50	75/65/20	1166	1003	3977	1547	1331	5277	1848	1590	6305	2123	1827	7242	2436	2096	8312	2823	2429	9632
	60	90/70/20	1476	1270	5036	1982	1705	6761	2369	2038	8081	2720	2340	9279	3122	2686	10651	3615	3111	12334
1600	30	55/45/20	640	551	2184	859	739	2932	1027	884	3504	1179	1015	4023	1421	1223	4848	1567	1349	5348
	42.5	70/55/20	1003	863	3422	1346	1159	4593	1609	1385	5490	1848	1590	6304	1638	1410	5590	2456	2114	8380
	50	75/65/20	1243	1070	4242	1650	1420	5628	1971	1696	6726	2264	1948	7725	2598	2236	8866	3011	2591	10274
	60	90/70/20	1574	1355	5372	2114	1819	7212	2526	2174	8620	2901	2496	9898	3330	2865	11361	3856	3318	13157
1800	30	55/45/20	720	620	2457	967	832	3298	1155	994	3942	1327	1142	4526	1598	1376	5454	1763	1518	6017
	42.5	70/55/20	1128	971	3849	1515	1303	5168	1810	1558	6177	2079	1789	7092	1843	1586	6289	2763	2378	9428
	50	75/65/20	1399	1204	4772	1856	1597	6332	2218	1908	7566	2547	2192	8690	2923	2516	9974	3388	2915	11558
	60	90/70/20	1771	1524	6043	2378	2046	8113	2842	2446	9698	3263	2808	11135	3746	3224	12781	4338	3733	14801
2000	30	55/45/20	800	688	2730	1074	924	3664	1284	1105	4380	1474	1268	5029	1776	1528	6060	1959	1686	6685
	42.5	70/55/20	1254	1079	4277	1683	1448	5742	2011	1731	6863	2310	1988	7880	2048	1762	6988	3070	2642	10475
	50	75/65/20	1554	1337	5302	2062	1775	7036	2464	2120	8407	2830	2435	9656	3248	2795	11082	3764	3239	12843
	60	90/70/20	1968	1694	6715	2642	2274	9015	3158	2718	10775	3626	3120	12372	4162	3582	14201	4820	4148	16446
2200	30	55/45/20	880	757	3003	1181	1017	4031	1412	1215	4818	1621	1395	5532	1954	1681	6666	2155	1855	7354
	42.5	70/50																		

Kompact LST COVERS

SIZES

30+

MATERIAL

STEEL

COLOUR

9016

PRESSURE TESTED TO

13 BAR

GUARANTEE

10 YEARS

Ideal for hospitals, retirement homes, nurseries, schools and public buildings, the Kartell range of LST Covers are available in over 30 sizes, produced using 1.5mm steel and are finished with a high quality white enamel finish.



DELIVERY CODE
D
THIS ITEM NORMALLY
DISPATCHED WITHIN
4-6 WEEKS OF ORDER

HEIGHT
OPTIONS
525MM TO
725MM

WIDTH
OPTIONS
700MM TO
2200MM

- Max surface temperature of 43°C fully conforms to NHS Estates specification
- Comprehensive range of over 30 sizes – additional sizes made to order
- LST Covers are produced using 1.5mm steel
- High Quality Finish – white enamel (RAL 9016 Traffic White)
- Covers maintain 190mm of space between the radiator to accommodate valves
- Covered to the floor using an optional kick grille

Type 21										
Code	Height (mm) (h)	Width (mm) (w)	Depth (mm) (d)	Rad Size	Output ΔT50°		Output ΔT60°		Price ex. VAT (£)	Price incl. VAT (£)
					Watts	BTUs	Watts	BTUs		
KLST507P	525	700	135	P405K	484	1652	620	2116	178.08	213.70
KLST510P	525	1000	135	P408K	775	2643	992	3386	220.08	264.10
KLST512P	525	1200	135	P410K	968	3304	1241	4233	232.00	278.40
KLST516P	525	1600	135	P414K	1356	4625	1737	5926	283.17	339.80
KLST522P	525	2200	135	P420K	1936	6607	2481	8465	358.67	430.40
KLST607P	625	700	135	P505K	578	1973	741	2528	186.50	223.80
KLST610P	625	1000	135	P508K	925	3158	1186	4046	230.92	277.10
KLST612P	625	1200	135	P510K	1157	3947	1482	5057	244.42	293.30
KLST616P	625	1600	135	P514K	1619	5526	2075	7080	299.08	358.90
KLST622P	625	2200	135	P520K	2314	7894	2964	10114	379.67	455.60
KLST707P	725	700	135	P605K	664	2267	851	2904	194.83	233.80
KLST710P	725	1000	135	P608K	1063	3627	1362	4647	241.92	290.30
KLST712P	725	1200	135	P610K	1329	4533	1702	5808	257.00	308.40
KLST716P	725	1600	135	P614K	1860	6347	2383	8131	315.08	378.10
KLST722P	725	2200	135	P620K	2657	9067	3405	11616	400.67	480.80

Type 22										
Code	Height (mm) (h)	Width (mm) (w)	Depth (mm) (d)	Rad Size	Output ΔT50°		Output ΔT60°		Price ex. VAT (£)	Price incl. VAT (£)
					Watts	BTUs	Watts	BTUs		
KLST507D	525	700	160	D405K	626	2134	801	2735	192.75	231.30
KLST510D	525	1000	160	D408K	1001	3415	1282	4375	223.42	268.10
KLST512D	525	1200	160	D410K	1251	4269	1603	5469	256.00	307.20
KLST516D	525	1600	160	D414K	1751	5976	2244	7657	286.50	343.80
KLST522D	525	2200	160	D420K	2502	8537	3206	10938	381.00	457.20
KLST607D	625	700	160	D505K	748	2553	959	3271	201.17	241.40
KLST610D	625	1000	160	D508K	1197	4085	1534	5234	234.33	281.20
KLST612D	625	1200	160	D510K	1497	5106	1917	6542	268.58	322.30
KLST616D	625	1600	160	D514K	2095	7149	2684	9159	302.50	363.00
KLST622D	625	2200	160	D520K	2993	10212	3835	13085	402.00	482.40
KLST707D	725	700	160	D605K	861	2938	1103	3765	209.58	251.50
KLST710D	725	1000	160	D608K	1378	4701	1765	6024	245.17	294.20
KLST712D	725	1200	160	D610K	1722	5877	2207	7530	281.25	337.50
KLST716D	725	1600	160	D614K	2411	8228	3090	10541	318.50	382.20
KLST722D	725	2200	160	D620K	3445	11754	4414	15059	423.00	507.60

Optional kick grille plinths									
Height (mm) (h)	Width (mm) (w)	Depth (mm) (d)	Code	Price ex. VAT (£)	Price incl. VAT (£)	Height (mm) (h)	Code	Price ex. VAT (£)	Price incl. VAT (£)
100	700	135	KKG0700P	40.67	48.80	160	KKG0700D	42.67	51.20
100	1000	135	KKG1000P	50.17	60.20	160	KKG1000D	50.17	60.20
100	1200	135	KKG1200P	52.33	62.80	160	KKG1200D	55.50	66.60
100	1600	135	KKG1600P	63.00	75.60	160	KKG1600D	63.00	75.60
100	2200	135	KKG2200P	81.58	97.90	160	KKG2200D	84.83	101.80

Prices are for covers only, they do not include the price of the radiator.

LST VALVE OPTIONS

- Valve installed using a 'cut-out' in the cover
- Valve installed within casing, temperature controlled by use of remote sensor
- Valve installed within casing, temperature controlled centrally by use of room stat
- Remote control TRV mechanism external of casing
- Chosen valve brand, model and position must be provided at point of order

K-FLAT KOMPACT VERTICAL

Our K-Flat vertical range is ideal for either commercial or domestic interior projects. It is available in both a single and double panel design to offer you the finest in efficiency and economical performance.



DELIVERY CODE
A

THIS ITEM NORMALLY
DISPATCHED WITHIN
48 HOURS OF ORDER

HEIGHT
OPTIONS
1800MM OR
2000MM

WIDTH
OPTIONS
300MM TO
600MM


AVAILABLE IN
RAL
COLOURS
SEE PAGES 7
FOR COLOUR
OPTIONS

Prices start
from under
£230.00
inc. VAT

K-FLAT: STANDARD PRODUCT RANGE

SIZES	MATERIAL	COLOUR	PRESSURE TESTED TO	GUARANTEE
13	STEEL	9061	13 BAR	10 YEARS

Type 10 Vertical Flat Radiator

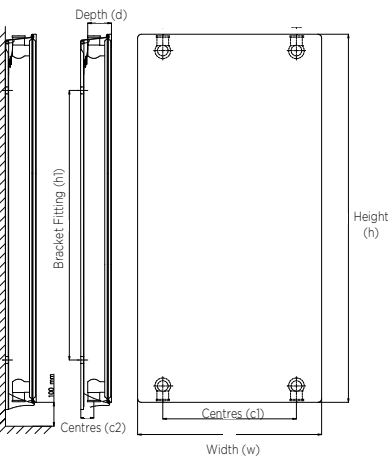

Sizes indicated may vary by + or - 2mm.

1800 Series

Height (h): 1800mm


TYPE 10 Single Panel No Side Panels										
Code	Width (mm) (w)	Depth (mm) (d)	Tapping Centres (mm)		Bracket fitting dimension (H1)	Output ΔT50°		Output ΔT60°		Price ex. VAT (£)
			(c1)	(c2)		Watts	BTUs	Watts	BTUs	
SV318F	300	52.5	245	42	1625	388	1323	490	1672	191.58
SV418F	400	52.5	345	42	1625	518	1768	655	2235	218.05
SV518F	500	52.5	445	42	1625	647	2208	818	2791	245.09
SV618F	600	52.5	545	42	1625	782	2667	988	3371	275.16

2000 Series

Height (h): 2000mm

SV520F	500	52.5	445	42	1825	718	2449	907	3095	259.94
SV620F	600	52.5	545	42	1825	863	2945	1091	3722	294.50

Type 20 Vertical Flat radiator

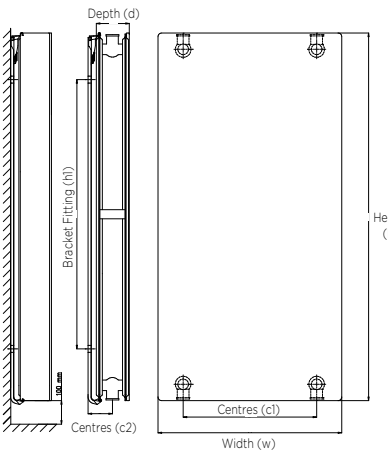

Sizes indicated may vary by + or - 2mm.

1800 Series

Height (h): 1800mm

Type 20 Double Panel with Side Panels										
Code	Width (mm) (w)	Depth (mm) (d)	Tapping Centres (mm)		Bracket fitting dimension (H1)	Output ΔT50°		Output ΔT60°		Price ex. VAT (£)
			(c1)	(c2)		Watts	BTUs	Watts	BTUs	
DV318F	300	72.5	245	59	1625	643	2195	813	2774	275.16
DV418F	400	72.5	345	59	1625	860	2934	1087	3709	313.94
DV518F	500	72.5	445	59	1625	1067	3642	1349	4603	355.14
DV618F	600	72.5	545	59	1625	1280	4368	1618	5521	393.41

2000 Series

Height (h): 2000mm

DV420F	400	72.5	345	59	1825	964	3290	1219	4159	336.39
DV520F	500	72.5	445	59	1825	1208	4122	1527	5210	382.19
DV620F	600	72.5	545	59	1825	1446	4934	1828	6237	425.06

K-FLAT Vertical radiators are supplied with an optional retaining stay for enhanced safety. We strongly recommend the implementation of the safety equipment and will not accept responsibility for issues or damage caused by not using the retaining stay.

1800 Series

Height (h): 1800mm

Width (mm) (w)	Weight per metre (litre)		Water content per metre (litre)	
	Single	Double	Single	Double
300	11.6	23.3	3.1	6.1
400	16.1	32.3	3.6	7.2
500	26.1	44.8	4.3	8.6
600	31.1	53.5	5	10.1

2000 Series

Height (h): 2000mm

Width (mm) (w)	Weight per metre (litre)		Water content per metre (litre)	
	Single	Double	Single	Double
400	—	36.1	—	8
500	28.8	49.8	4.8	9.6
600	34.4	59.4	5.6	11.2

Notes: Manufactured under BS EN ISO 9000 quality standards. Complete with installation package including brackets, bolts, vents and plugs. 4 fixing points, 1/2 tappings. Bright white finish (RAL 9016).

K-FLAT KOMPACT HORIZONTAL


Our K-Flat horizontal range is ideal for either commercial or domestic interior projects. It is available in both a single and double panel design to offer you the finest in efficiency and economical performance.




Prices start from under **£132.00** inc. VAT

Height (mm) (h)	Weight per metre (litre)		Water content per metre (litre)	
	Single	Double	Single	Double
300	10	20	1.7	3.4
400	14	27	2	4
500	18	34.5	2.4	4.8
600	≤21.5	41.5	2.8	5.6


Notes: Manufactured under BS EN ISO 9000 quality standards. Complete with installation package including brackets, bolts, vents and plugs. 4 fixing points, 1/2 tappings. Bright white finish (RAL 9016)



Type 11 Single Convector



Type 22 Double Convector

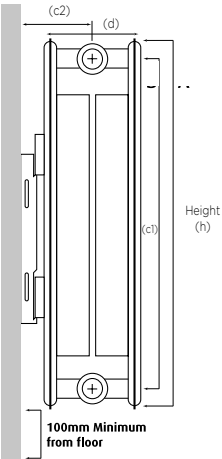

K-FLAT: STANDARD PRODUCT RANGE

SIZES	MATERIAL	COLOUR	PRESSURE TESTED TO	GUARANTEE
52	STEEL	9061	13 BAR	10 YEARS

300 Series
Height (h): 300mm

TYPE 11 Single Convector									
Code	Width (w) (mm)	Depth (d) (mm)	Tapping Centres (mm)		Output ΔT50°		Output ΔT60°		Price ex. VAT (£)
			(c1)	(c2)	Watts	BTUs	Watts	BTUs	
KS306F	600	56	245	40 or 55	285	973	360	1230	109.26
KS310F	1000	56	245	40 or 55	475	1621	601	2049	133.77
KS314F	1400	56	245	40 or 55	665	2269	841	2868	168.93

400 Series
Height (h): 400mm

TYPE 11 Single Convector									
Code	Width (w) (mm)	Depth (d) (mm)	Tapping Centres (mm)		Output ΔT50°		Output ΔT60°		Price ex. VAT (£)
			(c1)	(c2)	Watts	BTUs	Watts	BTUs	
KS404F	400	56	345	40 or 55	245	837	310	1058	90.91
KS406F	600	56	345	40 or 55	368	1255	465	1586	105.85
KS408F	800	56	345	40 or 55	491	1673	620	2115	125.38
KS410F	1000	56	345	40 or 55	613	2092	775	2644	145.10
KS412F	1200	56	345	40 or 55	736	2510	930	3173	168.25
KS414F	1400	56	345	40 or 55	858	2928	1085	3701	186.31
KS416F	1600	56	345	40 or 55	981	3347	1240	4230	207.30

500 Series
Height (h): 500mm

TYPE 11 Single Convector									
Code	Width (w) (mm)	Depth (d) (mm)	Tapping Centres (mm)		Output ΔT50°		Output ΔT60°		Price ex. VAT (£)
			(c1)	(c2)	Watts	BTUs	Watts	BTUs	
KS504F	400	56	445	40 or 55	297	1012	375	1279	99.89
KS506F	600	56	445	40 or 55	445	1517	562	1918	117.76
KS508F	800	56	445	40 or 55	593	2024	750	2558	141.29
KS510F	1000	56	445	40 or 55	741	2529	937	3197	165.42
KS512F	1200	56	445	40 or 55	889	3036	1124	3837	193.44
KS514F	1400	56	445	40 or 55	1038	3541	1312	4476	214.82
KS516F	1600	56	445	40 or 55	1186	4047	1499	5116	235.62

600 Series
Height (h): 600mm

TYPE 11 Single Convector									
Code	Width (w) (mm)	Depth (d) (mm)	Tapping Centres (mm)		Output ΔT50°		Output ΔT60°		Price ex. VAT (£)
			(c1)	(c2)	Watts	BTUs	Watts	BTUs	
KS604F	400	56	545	40 or 55	345	1178	436	1489	106.83
KS606F	600	56	545	40 or 55	517	1767	654	2233	127.92
KS608F	800	56	545	40 or 55	691	2355	873	2977	155.45
KS610F	1000	56	545	40 or 55	863	2945	1091	3722	183.09
KS612F	1200	56	545	40 or 55	1036	3533	1309	4466	205.84
KS614F	1400	56	545	40 or 55	1208	4123	1527	5211	239.73
KS616F	1600	56	545	40 or 55	1381	4711	1745	5955	263.84
KS618F	1800	56	545	40 or 55	1553	5300	1963	6699	287.18
KS620F	2000	56	545	40 or 55	1726	5889	2182	7444	310.81

TYPE 22 Double Convector									
Code	Width (w) (mm)	Depth (d) (mm)	Tapping Centres (mm)		Output ΔT50°		Output ΔT60°		Price ex. VAT (£)
			(c1)	(c2)	Watts	BTUs	Watts	BTUs	
KD306F	600	105	245	82.5 or 97.5	572	1952	723	2467	142.46
KD310F	1000	105	245	82.5 or 97.5	953	3252	1205	4111	187.97
KD314F	1400	105	245	82.5 or 97.5	1335	4554	1687	5756	247.24

TYPE 22 Double Convector									
Code	Width (w) (mm)	Depth (d) (mm)	Tapping Centres (mm)		Output ΔT50°		Output ΔT60°		Price ex. VAT (£)
			(c1)	(c2)	Watts	BTUs	Watts	BTUs	
KD404F	400	105	345	82.5 or 97.5	484	1653	612	2089	117.47
KD406F	600	105	345	82.5 or 97.5	726	2479	918	3133	142.76
KD408F	800	105	345	82.5 or 97.5	968	3305	1224	4178	174.59
KD410F	1000	105	345	82.5 or 97.5	1211	4131	1531	5222	206.53
KD412F	1200	105	345	82.5 or 97.5	1453	4957	1837	6266	242.36
KD414F	1400	105	345	82.5 or 97.5	1695	5784	2143	7311	272.43
KD416F	1600	105	345	82.5 or 97.5	1938	6610	2449	8355	305.83

TYPE 22 Double Convector									
Code	Width (w) (mm)	Depth (d) (mm)	Tapping Centres (mm)		Output ΔT50°		Output ΔT60°		Price ex. VAT (£)
			(c1)	(c2)	Watts	BTUs	Watts	BTUs	
KD504F	400	105	445	82.5 or 97.5	579	1977	732	2499	132.60
KD506F	600	105	445	82.5 or 97.5	869	2965	1099	3748	163.36
KD508F	800	105	445	82.5 or 97.5	1159	3953	1465	4997	202.32
KD510F	1000	105	445	82.5 or 97.5	1449	4942	1831	6247	241.58
KD512F	1200	105	445	82.5 or 97.5	1738	5930	2197	7496	284.64
KD514F	1400	105	445	82.5 or 97.5	2028	6919	2563	8746	321.25
KD516F	1600	105	445	82.5 or 97.5	2317	7907	2929	9995	357.38

TYPE 22 Double Convector									
Code	Width (w) (mm)	Depth (d) (mm)	Tapping Centres (mm)		Output ΔT50°		Output ΔT60°		Price ex. VAT (£)
			(c1)	(c2)	Watts	BTUs	Watts	BTUs	
KD604F	400	105	545	82.5 or 97.5	667	2275	843	2876	146.47
KD606F	600	105	545	82.5 or 97.5	1000	3413	1264	4314	183.09
KD608F	800	105	545	82.5 or 97.5	1334	4551	1686	5752	229.37
KD610F	1000	105	545	82.5 or 97.5	1667	5688	2107	7190	275.46
KD612F	1200	105	545	82.5 or 97.5	2001	6825	2529	8627	325.55
KD614F	1400	105	545	82.5 or 97.5	2334	7963	2950	10065	369.00
KD616F	1600	105	545	82.5 or 97.5	2667	9100	3371	11503	411.77
KD618F	1800	105	545	82.5 or 97.5	3001	10238	3793	12941	453.57
KD620F	2000	105	545	82.5 or 97.5	3334	11376	4214	14379	495.84

K-FLAT KOMPACT PREMIUM VERTICAL

Our K-Flat premium vertical range is ideal for either commercial or domestic interior projects that require that something extra, and is also available in both a single and double panel design to offer you the finest in efficiency and economical performance.

DELIVERY CODE
A

THIS ITEM NORMALLY
DISPATCHED WITHIN
48 HOURS OF ORDER

HEIGHT
OPTIONS
1800MM OR
2000MM

WIDTH
OPTIONS
300MM TO
600MM


AVAILABLE IN
RAL
COLOURS
SEE PAGES 7
FOR COLOUR
OPTIONS

Prices start
from under
£265.00
inc. VAT

K-FLAT: STANDARD PRODUCT RANGE

SIZES	MATERIAL	COLOUR	PRESSURE TESTED TO	GUARANTEE
13	STEEL	9061	13 BAR	10 YEARS

Type 10 Vertical Flat Radiator

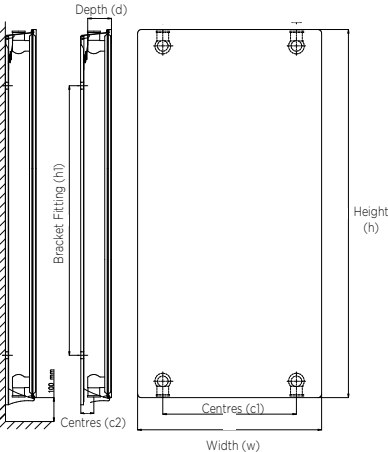

Sizes indicated may vary by + or - 2mm.


1800 Series
Height (h): 1800mm

2000 Series
Height (h): 2000mm

TYPE 10 Single Panel (No Side Panels)											
Code	Width (mm) (w)	Depth (mm) (d)	Tapping Centres (mm)		Bracket fitting dimension (H)	Output ΔT50°		Output ΔT60°		Price ex. VAT (£)	Price incl. VAT (£)
			(c1)	(c2)		Watts	BTUs	Watts	BTUs		
SV318FP	300	52.5	245	42	1625	388	1323	490	1672	220.29	264.34
SV418FP	400	52.5	345	42	1625	518	1768	655	2235	250.75	300.90
SV518FP	500	52.5	445	42	1625	647	2208	818	2791	281.80	338.16
SV618FP	600	52.5	545	42	1625	782	2667	988	3371	316.47	379.77

SV520FP	500	52.5	445	42	1825	718	2449	907	3095	298.89	358.67
SV620FP	600	52.5	545	42	1825	863	2945	1091	3722	338.73	406.48

Type 20 Vertical Flat radiator

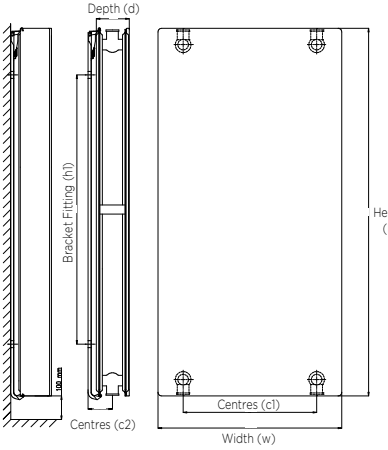

Sizes indicated may vary by + or - 2mm.

1800 Series
Height (h): 1800mm

2000 Series
Height (h): 2000mm

Type 20 Double Panel (With Side Panels)											
Code	Width (mm) (w)	Depth (mm) (d)	Tapping centres (mm)		Bracket fitting dimension (H)	Output ΔT50°		Output ΔT60°		Price ex. VAT (£)	Price incl. VAT (£)
			(c1)	(c2)		Watts	BTUs	Watts	BTUs		
DV318FP	300	72.5	245	59	1625	643	2195	813	2774	316.47	379.77
DV418FP	400	72.5	345	59	1625	860	2934	1087	3709	360.99	433.19
DV518FP	500	72.5	445	59	1625	1067	3642	1349	4603	408.46	490.15
DV618FP	600	72.5	545	59	1625	1280	4368	1618	5521	452.40	542.88

DV420FP	400	72.5	345	59	1825	964	3290	1219	4159	386.78	464.13
DV520FP	500	72.5	445	59	1825	1208	4122	1527	5210	439.60	527.52
DV620FP	600	72.5	545	59	1825	1446	4934	1828	6237	488.72	586.47

K-FLAT Vertical radiators are supplied with an optional retaining stay for enhanced safety. We strongly recommend the implementation of the safety equipment and will not accept responsibility for issues or damage caused by not using the retaining stay.

1800 Series
Height (h): 1800mm

Width (mm) (w)	Weight per metre (litre)		Water content per metre (litre)	
	Single	Double	Single	Double
300	11.6	23.3	3.1	6.1
400	16.1	32.3	3.6	7.2
500	26.1	44.8	4.3	8.6
600	31.1	53.5	5	10.1

2000 Series
Height (h): 2000mm

Width (mm) (w)	Weight per metre (litre)		Water content per metre (litre)	
	Single	Double	Single	Double
400	—	36.1	—	8
500	28.8	49.8	4.8	9.6
600	34.4	59.4	5.6	11.2

Notes: Manufactured under BS EN ISO 9000 quality standards. Complete with installation package including brackets, bolts, vents and plugs. 4 fixing points, 1/2 tappings. Bright white finish (RAL 9016)

K-FLAT KOMPACT PREMIUM HORIZONTAL

Our K-Flat premium horizontal range is ideal for either commercial or domestic interior projects that require that something extra, and is also available in both a single and double panel design to offer you the finest in efficiency and economical performance.



DELIVERY CODE
A

THIS ITEM NORMALLY
DISPATCHED WITHIN
48 HOURS OF ORDER


HEIGHT
OPTIONS
300MM TO
600MM

WIDTH
OPTIONS
400MM TO
2000MM


Prices start
from under
£158.00
inc. VAT




Height (mm) (h)	Weight per metre (litre)		Water content per metre (litre)	
	Single	Double	Single	Double
300	10	20	1.7	3.4
400	14	27	2	4
500	18	34.5	2.4	4.8
600	21.5	41.5	2.8	5.6



Type 11 Single Convector

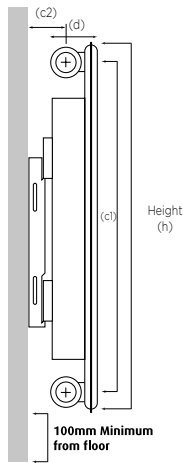

Type 22 Double Convactor

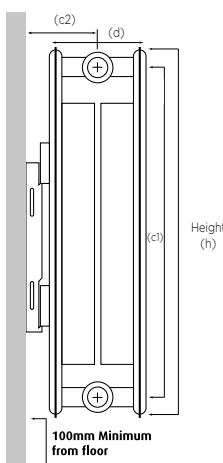

Notes: Manufactured under BS EN ISO 9000 quality standards. Complete with installation package including brackets, bolts, vents and plugs. 4 fixing points, 1/2 tappings. Bright white finish (RAL 9016)

Online: www.kartelluk.com

K-FLAT: STANDARD PRODUCT RANGE

SIZES	MATERIAL	COLOUR	PRESSURE TESTED TO	GUARANTEE
52	STEEL	9061	13 BAR	10 YEARS

300 Series Height (h): 300mm

TYPE 11 Single Convactor									
Code	Width (mm) (w)	Depth (d) (mm)	Tapping Centres (mm)		Output ΔT50°		Output ΔT60°		Price ex. VAT (£)
			(c1)	(c2)	Watts	BTUs	Watts	BTUs	
KS306FP	600	56	245	40 or 55	285	973	360	1230	131.14
KS310FP	1000	56	245	40 or 55	475	1621	601	2049	160.53
KS314FP	1400	56	245	40 or 55	665	2269	841	2868	202.71

TYPE 22 Double Convactor									
Code	Width (mm) (w)	Depth (d) (mm)	Tapping Centres (mm)		Output ΔT50°		Output ΔT60°		Price ex. VAT (£)
			(c1)	(c2)	Watts	BTUs	Watts	BTUs	
KD306FP	600	105	245	82.5 or 97.5	572	1952	723	2467	170.98
KD310FP	1000	105	245	82.5 or 97.5	953	3252	1205	4111	225.56
KD314FP	1400	105	245	82.5 or 97.5	1335	4554	1687	5756	296.74

400 Series Height (h): 400mm

TYPE 11 Single Convactor									
Code	Width (mm) (w)	Depth (d) (mm)	Tapping Centres (mm)		Output ΔT50°		Output ΔT60°		Price ex. VAT (£)
			(c1)	(c2)	Watts	BTUs	Watts	BTUs	
KS404FP	400	56	345	40 or 55	245	837	310	1058	109.07
KS406FP	600	56	345	40 or 55	368	1255	465	1586	127.04
KS408FP	800	56	345	40 or 55	491	1673	620	2115	150.47
KS410FP	1000	56	345	40 or 55	613	2092	775	2644	174.11
KS412FP	1200	56	345	40 or 55	736	2510	930	3173	201.93
KS414FP	1400	56	345	40 or 55	858	2928	1085	3701	223.51
KS416FP	1600	56	345	40 or 55	981	3347	1240	4230	248.80

TYPE 22 Double Convactor									
Code	Width (mm) (w)	Depth (d) (mm)	Tapping Centres (mm)		Output ΔT50°		Output ΔT60°		Price ex. VAT (£)
			(c1)	(c2)	Watts	BTUs	Watts	BTUs	
KD404FP	400	105	345	82.5 or 97.5	484	1653	612	2089	141.00
KD406FP	600	105	345	82.5 or 97.5	726	2479	918	3133	171.37
KD408FP	800	105	345	82.5 or 97.5	968	3305	1224	4178	209.54
KD410FP	1000	105	345	82.5 or 97.5	1211	4131	1531	5222	247.92
KD412FP	1200	105	345	82.5 or 97.5	1453	4957	1837	6266	290.79
KD414FP	1400	105	345	82.5 or 97.5	1695	5784	2143	7311	327.02
KD416FP	1600	105	345	82.5 or 97.5	1938	6610	2449	8355	367.05

500 Series Height (h): 500mm

TYPE 11 Single Convactor									
Code	Width (mm) (w)	Depth (d) (mm)	Tapping Centres (mm)		Output ΔT50°		Output ΔT60°		Price ex. VAT (£)
			(c1)	(c2)	Watts	BTUs	Watts	BTUs	
KS504FP	400	56	445	40 or 55	297	1012	375	1279	119.91
KS506FP	600	56	445	40 or 55	445	1517	562	1918	141.29
KS508FP	800	56	445	40 or 55	593	2024	750	2558	169.61
KS510FP	1000	56	445	40 or 55	741	2529	937	3197	198.42
KS512FP	1200	56	445	40 or 55	889	3036	1124	3837	232.10
KS514FP	1400	56	445	40 or 55	1038	3541	1312	4476	257.79
KS516FP	1600	56	445	40 or 55	1186	4047	1499	5116	282.78

TYPE 22 Double Convactor									
Code	Width (mm) (w)	Depth (d) (mm)	Tapping Centres (mm)		Output ΔT50°		Output ΔT60°		Price ex. VAT (£)
			(c1)	(c2)	Watts	BTUs	Watts	BTUs	
KD504FP	400	105	445	82.5 or 97.5	579	1977	732	2499	159.16
KD506FP	600	105	445	82.5 or 97.5	869	2965	1099	3748	195.97
KD508FP	800	105	445	82.5 or 97.5	1159	3953	1465	4997	242.74
KD510FP	1000	105	445	82.5 or 97.5	1449	4942	1831	6247	289.91
KD512FP	1200	105	445	82.5 or 97.5	1738	5930	2197	7496	341.56
KD514FP	1400	105	445	82.5 or 97.5	2028	6919	2563	8746	385.50
KD516FP	1600	105	445	82.5 or 97.5	2317	7907	2929	9995	428.86

600 Series Height (h): 600mm

TYPE 11 Single Convactor									
Code	Width (mm) (w)	Depth (d) (mm)	Tapping Centres (mm)		Output ΔT50°		Output ΔT60°		Price ex. VAT (£)
			(c1)	(c2)	Watts	BTUs	Watts	BTUs	
KS604FP	400	56	545	40 or 55	345	1178	436	1489	128.21
KS606FP	600	56	545	40 or 55	517	1767	654	2233	153.50
KS608FP	800	56	545	40 or 55	691	2355	873	2977	186.60
KS610FP	1000	56	545	40 or 55	863	2945	1091	3722	219.70
KS612FP	1200	56	545	40 or 55	1036	3533	1309	4466	247.04
KS614FP	1400	56	545	40 or 55	1208	4123	1527	5211	287.57
KS616FP	1600	56	545	40 or 55	1381	4711	1745	5955	316.67
KS618FP	1800	56	545	40 or 55	1553	5300	1963	6699	344.59
KS620FP	2000	56	545	40 or 55	1726	5889	2182	7444	373.01

TYPE 22 Double Convactor									
Code	Width (mm) (w)	Depth (d) (mm)	Tapping Centres (mm)		Output ΔT50°		Output ΔT60°		Price ex. VAT (£)
			(c1)	(c2)	Watts	BTUs	Watts	BTUs	
KD604FP	400	105	545	82.5 or 97.5	667	2275	843	2876	175.86
KD606FP	600	105	545	82.5 or 97.5	1000	3413	1264	4314	219.70
KD608FP	800	105	545	82.5 or 97.5	1334	4551	1686	5752	275.26
KD610FP	1000	105	545	82.5 or 97.5	1667	5688	2107	7190	330.54
KD612FP	1200	105	545	82.5 or 97.5	2001	6825	2529	8627	390.68
KD614FP	1400	105	545	82.5 or 97.5	2334	7963	2950	10065	442.83
KD616FP	1600	105	545	82.5 or 97.5	2667	9100	3371	11503	494.09
KD618FP	1800	105	545	82.5 or 97.5	3001	10238	3793	12941	544.28
KD620FP	2000	105	545	82.5 or 97.5	3334	11376	4214	14379	594.96

Online: www.kartelluk.com

LASER KLASSIC HORIZONTAL

The stylish design of the Laser Klassic feels at home in any environment. This is a truly versatile radiator that fits comfortably in any room from living rooms to bathrooms.

Choose from our most popular product range or create your own solution. Our horizontal range comprises a selection of heights and lengths plus over 70 colours to select from offering you the ultimate solution in terms of both flexibility and choice.

DELIVERY
CODE
A

THIS ITEM IS NORMALLY
DISPATCHED WITHIN
48 HOURS OF ORDER

COLUMN
OPTIONS
2-6

HEIGHT
OPTIONS
300MM TO
750MM

SEE CHART TO RIGHT TO
SEE SPECIFIC HEIGHT
OPTIONS

WIDTH
OPTIONS
644MM TO
1380MM

SEE CHART TO RIGHT
TO SEE SPECIFIC WIDTH
OPTIONS



SEE PAGES 7
FOR COLOUR
OPTIONS

Prices start
from under
£255.00
incl. VAT (£)

PERFECTLY
ASSEMBLED
USING LASER
WELDING
TECHNOLOGY

SIZE OPTIONS & PRICING



SIZES	COLOUR	PRESSURE TESTED TO	GUARANTEE
23	9016	10 BAR	10 YEARS

2 columns Radiator depth 66mm (C)	Code	Height (mm)	C/C Tappings (mm)	Width (mm)	No. of Sections	Heat Output $\Delta T50^\circ$		Total Weight (Kg)	Water Content (Litre)	Price ex. VAT (£)	Price incl. VAT (£)
		A	B			Watts	BTUs				
	LCL206014	600	535	650	14	613	2092	13.4	8.0	212.00	254.40
	LCL206018	600	535	830	18	788	2690	17.3	10.3	266.75	320.10
	LCL206022	600	535	1010	22	984	3288	21.1	12.5	322.42	386.90
	LCL206026	600	535	1190	26	1139	3886	25.0	14.8	375.42	450.50


3 columns Radiator depth 107mm (C)	Code	Height (mm)	C/C Tappings (mm)	Width (mm)	No. of Sections	Heat Output $\Delta T50^\circ$		Total Weight (Kg)	Water Content (Litre)	Price ex. VAT (£)	Price incl. VAT (£)
		A	B			Watts	BTUs				
	LCL306014	600	535	650	14	862	2943	19.9	12.0	229.67	275.60
	LCL306018	600	535	830	18	1109	3783	25.6	15.5	291.50	349.80
	LCL306022	600	535	1010	22	1355	4624	31.2	18.9	348.92	418.70
	LCL306026	600	535	1190	26	1602	5465	36.9	22.4	410.75	492.90

4 columns Radiator depth 148mm (C)	Code	Height (mm)	C/C Tappings (mm)	Width (mm)	No. of Sections	Heat Output $\Delta T50^\circ$		Total Weight (Kg)	Water Content (Litre)	Price ex. VAT (£)	Price incl. VAT (£)
		A	B			Watts	BTUs				
	LCL404014	400	335	650	14	781	2665	19.2	11.5	322.42	386.90
	LCL404018	400	335	830	18	1004	3427	24.7	14.8	410.75	492.90
	LCL404022	400	335	1010	22	1228	4189	30.1	18.0	499.08	598.90
	LCL404026	400	335	1190	26	1451	4950	35.6	21.3	587.42	704.90
	LCL406014	600	535	650	14	1124	3836	27.0	16.0	260.58	312.70
	LCL406018	600	535	830	18	1445	4932	34.7	20.5	331.25	397.50
	LCL406022	600	535	1010	22	1767	6028	42.5	25.1	397.50	477.00
	LCL406026	600	535	1190	26	2088	7124	50.2	29.6	469.08	562.90
	LCL407514	750	685	650	14	1380	4710	32.3	19.3	295.92	355.10
	LCL407518	750	685	830	18	1775	6056	41.6	24.8	371.00	445.20
	LCL407522	750	685	1010	22	2169	7401	50.8	30.4	450.50	540.60
	LCL407526	750	685	1190	26	2564	8747	60.1	35.9	530.00	636.00

6 columns Radiator depth 230mm (C)	Code	Height (mm)	C/C Tappings (mm)	Width (mm)	No. of Sections	Heat Output $\Delta T50^\circ$		Total Weight (Kg)	Water Content (Litre)	Price ex. VAT (£)	Price incl. VAT (£)
		A	B			Watts	BTUs				
	LCL603022	300	235	1010	22	1384	4722	33.0	20.9	366.58	439.90
	LCL603026	300	235	1190	26	1635	5580	39.0	24.7	432.83	519.40
	LCL603030	300	235	1370	30	1887	6438	45.0	28.5	494.67	593.60

CREATE
YOUR OWN
SOLUTION

SEE PAGE
33



Bespoke manufactured radiators also available, see page 33 for further details

optional feet (in pairs) adds 120mm to the height	Code	Description	Price (inc VAT)
	T2F	2 column	£76.30 per pair
	T3F	3 column	£76.30 per pair
	T4F	4 column	£76.30 per pair
	T6F	6 column	£76.30 per pair



All options come complete with fixings

**Crown heated
towel rail**
with Laser Klassic
column radiator: please
contact us for technical
specifications and
pricing details.



LASER KLASSIC VERTICAL

The stylish design of the Laser Klassic feels at home in any environment. This is a truly versatile radiator that fits comfortably in any room from living rooms to bathrooms.

Prices start from under **£292.00** incl. VAT (£)

DELIVERY CODE A
THIS ITEM IS NORMALLY DESPATCHED WITHIN 48 HOURS OF ORDER

COLUMN OPTIONS 2-3

HEIGHT OPTIONS 1500MM TO 1800 MM
SEE CHART TO RIGHT TO SEE SPECIFIC HEIGHT OPTIONS

WIDTH OPTIONS 322MM TO 506MM
SEE CHART TO RIGHT TO SEE SPECIFIC WIDTH OPTIONS


SEE PAGES 7 FOR COLOUR OPTIONS

PERFECTLY ASSEMBLED USING LASER WELDING TECHNOLOGY

SIZE OPTIONS & PRICING




SIZES 9

PRESSURE TESTED TO 10 BAR

GUARANTEE 10 YEARS

2 columns Radiator depth 66mm (C)	Code	Height (mm)	C/C Tappings (mm)	Width (mm)	No. of Sections	Heat Output $\Delta T50^{\circ}$		Total Weight (Kg)	Water Content (Litre)	Price ex. VAT (£)	Price incl. VAT (£)
		A	B			Watts	BTUs				
	LCL215007	1500	1435	335	7	725	2474	14.8	9.0	242.92	291.50
	LCL215009	1500	1435	425	9	932	3181	19.0	11.5	309.17	371.00
	LCL215011	1500	1435	515	11	1140	3888	23.2	14.1	371.00	445.20
	LCL218007	1800	1735	335	7	871	2971	17.6	10.6	249.08	298.90
	LCL218009	1800	1735	425	9	1120	3820	22.6	13.6	316.25	379.50
	LCL218011	1800	1735	515	11	1368	4669	27.6	16.6	379.83	455.80



3 columns Radiator depth 107mm (C)	Code	Height (mm)	C/C Tappings (mm)	Width (mm)	No. of Sections	Heat Output $\Delta T50^{\circ}$		Total Weight (Kg)	Water Content (Litre)	Price	Price
		A	B			Watts	BTUs			ex. VAT (£)	incl. VAT (£)
		LCL318007	1800	1735	335	7	1174	4005	27.4	16.2	309.17
	LCL318009	1800	1735	425	9	1509	5150	35.3	20.8	397.50	477.00
	LCL318011	1800	1735	515	11	1845	6294	43.1	25.4	477.00	572.40

Radiators with a height of 1500mm and 1800mm are supplied with a factory fitted water diverter.

D (wall to back of radiator) = 30mm/40mm dependent on radiator position on the bracket.



Optional feet also available at £76.30 per pair for vertical designs, see page 31 for options and further details.

All options come complete with fixings

CREATE YOUR OWN: LASER KLASSIC

If our most popular sizes don't quite fit your requirements then we can put you in total control to be as creative as you like and design your own solution. Simply select your height and heat output from the options below, and determine your ideal width by dividing your total by the standard column width (45mm) and please allow 20mm for the tappings. Remember to round up or down your final number of sections as appropriate as the finished radiator can only comprise of finished sections.

£POA
PRICE ON APPLICATION

DELIVERY CODE D
THIS ITEM IS NORMALLY DESPATCHED WITHIN 4-6 WEEKS OF ORDER

		2 Columns			3 Columns			4 Columns			5 Columns			6 Columns		
		Depth = 66mm			Depth = 107mm			Depth = 148mm			Depth = 189mm			Depth = 230mm		
		Standard Column Width = 45mm														
Height (mm)	Center Distance (mm)	Water Content (l/sct)	Section Weight (Kg)	Heat Output ΔT = 50° Qn=(W)	Water Content (l/sct)	Section Weight (Kg)	Heat Output ΔT = 50° Qn=(W)	Water Content (l/sct)	Section Weight (Kg)	Heat Output ΔT = 50° Qn=(W)	Water Content (l/sct)	Section Weight (Kg)	Heat Output ΔT = 50° Qn=(W)	Water Content (l/sct)	Section Weight (Kg)	Heat Output ΔT = 50° Qn=(W)
300	225	0.33	0.55	23.6	0.50	0.77	33.0	0.66	1.09	43.6	0.77	1.27	53.9	0.95	1.50	62.9
400	335	0.41	0.69	30.5	0.62	0.99	42.8	0.82	1.37	55.8	0.97	1.62	69.5	1.19	2.00	82.5
500	435	0.49	0.83	37.2	0.74	1.20	52.3	0.98	1.65	68.0	1.17	1.99	84.5	1.43	2.40	101.5
600	535	0.57	0.96	43.8	0.86	1.42	61.6	1.14	1.93	80.3	1.37	2.39	99.1	1.67	2.84	120.0
750	68	0.69	1.17	53.7	1.03	1.72	75.4	1.38	2.31	98.6	1.67	2.92	120.5	2.03	3.44	146.9
900	835	0.81	1.35	63.5	1.20	2.03	88.9	1.62	2.67	116.9	1.97	3.39	141.4	2.39	4.06	172.2
1000	935	0.88	1.49	70.1	1.28	2.24	97.8	1.76	2.95	129.1	2.16	3.47	155.0	2.63	4.48	189.8
1500	1435	1.28	2.11	103.6	1.88	3.30	141.7	2.56	4.35	184.1	3.17	5.44	221.1	3.83	6.58	268.9
1800	1735	1.51	2.51	124.4	2.31	3.92	167.7	3.02	5.15	217.0	3.69	6.54	259.4	4.45	7.84	312.7
2000	1935	1.67	2.79	138.7	2.55	4.35	185.0	3.34	5.71	237.6	4.09	7.24	284.6	5.03	8.76	340.5
2200	2135	1.82	3.10	153.0	2.79	4.90	203.0	3.66	6.20	258.0	4.49	7.99	310.0	6.05	9.70	370.8
2500	2435	2.03	3.49	175.9	3.14	5.40	228.3	4.13	7.11	288.9	5.11	8.99	346.4	6.23	10.86	405.4

Please note: Any orders over 30 sections will be sent in 2 or more parts and will need to be joined.

LEGACY

SIZES

336

PRESSURE TESTED TO

10 BAR

GARANTEE

10 YEARS

Our Legacy radiator details a classic vintage design and is the smart, versatile choice for any interior, from contemporary to traditional. With the widest range of sizes and options available, the Legacy offers you the ultimate solution in terms of style, luxury and choice. Either choose from our most popular range of standard designs or create your own solution.

DELIVERY CODE
A

THIS ITEM IS NORMALLY DISPATCHED WITHIN 48 HOURS OF ORDER

COLUMN OPTIONS
4/6

HEIGHT OPTIONS
360MM TO 960MM

SEE CHART ON PAGE 14-15 TO SEE SPECIFIC HEIGHT OPTIONS

WIDTH OPTIONS
180MM TO 3000MM

SEE CHART ON PAGE 14-15 TO SEE SPECIFIC WIDTH OPTIONS



SEE PAGES 7 FOR COLOUR OPTIONS

Prices start from under
£124.00
incl. VAT (£)

Optional Paw Foot



AVAILABLE WITH
CREATE YOUR OWN
MODELS ONLY
£30.52
EACH
INC. VAT

Height of Paw Foot: 80mm

Shown finished in Black RAL9005

CHOOSE YOUR OWN: LEGACY


At Kartell, we know what our customers want. We have detailed below our most popular size options for you to browse. These radiators fit perfectly in any room, whether it is a bathroom, kitchen or hallway, and offers you an 'off the shelf' solution with quicker delivery times and a more efficient all-round service. Simply choose the option that works best for you and place your order using the order code and pricing information specified below.

CREATE
YOUR OWN
SOLUTION

SEE PAGES
36-37

(H) 660 X (W) 600 X (D) 144	(H) 660 X (W) 780 X (D) 144	(H) 660 X (W) 1020 X (D) 144	(H) 660 X (W) 1260 X (D) 144
Product Code 4/65/10 £497.91 incl. VAT £414.93 (ex. VAT)	Product Code 4/65/13 £650.84 incl. VAT £542.37 (ex. VAT)	Product Code 4/65/17 £842.79 incl. VAT £702.32 (ex. VAT)	Product Code 4/65/21 £1034.74 incl. VAT £862.28 (ex. VAT)

Product Code	Tapping Centre (c1) (mm)	Heat Output Δt50°C		Heat Output Δt60°C		Price ex. VAT (£)	Price incl. VAT (£)
		Watts	BTU	Watts	BTU		
4/65/10	620	930	3170	1176	4007	414.93	497.91
4/65/13	800	1209	4121	1528	5209	542.37	650.84
4/65/17	1040	1581	5389	1998	6812	702.32	842.79
4/65/21	1280	1953	6657	2469	8414	862.28	1034.74



(H) 760 X (W) 600 X (D) 144	(H) 760 X (W) 780 X (D) 144	(H) 760 X (W) 1020 X (D) 144	(H) 760 X (W) 1260 X (D) 144
Product Code 4/75/10 £552.19 incl. VAT £460.16 (ex. VAT)	Product Code 4/75/13 £721.47 incl. VAT £601.23 (ex. VAT)	Product Code 4/75/17 £935.22 incl. VAT £779.35 (ex. VAT)	Product Code 4/75/21 £1148.86 incl. VAT £957.38 (ex. VAT)

Product Code	Tapping Centre (c1) (mm)	Heat Output Δt50°C		Heat Output Δt60°C		Price ex. VAT (£)	Price incl. VAT (£)
		Watts	BTU	Watts	BTU		
4/75/10	620	1080	3680	1365	4652	460.16	552.19
4/75/13	800	1404	4784	1775	6047	601.23	721.47
4/75/17	1040	1836	6256	2321	7908	779.35	935.22
4/75/21	1280	2268	7728	2867	9768	957.38	1148.86

(H) 485 X (W) 1020 X (D) 221	(H) 485 X (W) 1260 X (D) 221
Product Code 6/48/17 £919.85 incl. VAT £766.54 (ex. VAT)	Product Code 6/48/21 £1130.00 incl. VAT £941.67 (ex. VAT)

Product Code	Tapping Centre (c1) (mm)	Heat Output Δt50°C		Heat Output Δt60°C		Price ex. VAT (£)	Price incl. VAT (£)
		Watts	BTU	Watts	BTU		
6/48/17	1040	1615	5525	2041	6984	766.54	919.85
6/48/21	1280	1995	6825	2522	8627	941.67	1130.00

Off the shelf radiators – details.


- List prices include retaining stays, tapping bushes & air vent
- Supplied in dark grey primer (RAL7022) for over painting. RAL colour finish available POA.
- All items available immediately
- Centres (c1) = number of sections x 60mm + 20mm.

CREATE YOUR OWN: LEGACY

If our most popular sizes don't quite fit your requirements then we can put you in total control to be as creative as you like and design your own solution. Simply select your required height and corresponding model number, and determine your ideal length and number of sections required using the information below. Remember to round up or down your final number of sections as appropriate as the finished radiator can only comprise of finished sections.

DELIVERY CODE
C

THIS ITEM NORMALLY
DISPATCHED WITHIN
7-10 DAYS OF ORDER



Product Code (Heating Only)	Height (mm) (h)	Width (mm) (w)	Depth (mm) / No. of Columns (d)	Tapping Centres (mm)		Heat Output Δt50°C		Heat Output Δt60°C	
				(c2)	(c4)	Watts	BTUs	Watts	BTUs
Legacy (Floor Standing) Option - details per section									
4/28L	360	60	144 / 4	102 / 112	200	44	149	55	188
4/42L	475	60	144 / 4	102 / 112	320	65	222	82	281
4/65L	660	60	144 / 4	102 / 112	500	93	317	118	402
4/75L	760	60	144 / 4	102 / 112	600	108	368	137	466
4/95L	960	60	144 / 4	102 / 112	800	139	473	176	600
6/48L	485	60	221 / 6	142 / 152	350	95	325	121	412
6/65L	660	60	221 / 6	142 / 152	500	133	454	168	575

STEP BY STEP GUIDE: HOW TO BUILD A CAST IRON RADIATOR

1. Measure the width and height of the space you have to fit the radiator in, or calculate the output you require in your room
2. Use the tables below to work out which radiator fits your size requirements
3. Check how many retaining stays are required
4. Decide if you want integrated legs or separate paw feet
5. Ensure you have a joining key to check all joints are tight before installing
6. If the radiator is over 17 sections you will also need the joining key to join the sections together. All other joining accessories will be supplied
7. Decide if you want the radiator painted and if so pick a colour from the RAL chart on pages 6-7
8. Place your order with your local supplier

Model		4/28				4/42				4/65				No. of stays needed	No. of optional paw feet needed
Length mm	No. of Sections	ΔT50°C		Price ex. VAT (£)	Price incl. VAT (£)	ΔT50°C		Price ex. VAT (£)	Price incl. VAT (£)	ΔT50°C		Price ex. VAT (£)	Price incl. VAT (£)		
		Watts	BTU's			Watts	BTU's			Watts	BTU's				
180	3	132	447	103.28	123.93	195	666	108.18	129.82	279	951	119.90	143.88	2	2
240	4	176	596	137.70	165.24	260	888	144.24	173.09	372	1268	159.87	191.84	2	2
300	5	220	745	172.13	206.56	325	1110	180.30	216.37	465	1585	199.83	239.80	2	2
360	6	264	894	206.56	247.87	390	1332	216.37	259.64	558	1902	239.80	287.76	2	2
420	7	308	1043	240.98	289.18	455	1554	252.43	302.91	651	2219	279.77	335.72	2	2
480	8	352	1192	275.41	330.49	520	1776	288.49	346.18	744	2536	319.73	383.68	2	2
540	9	396	1341	309.83	371.80	585	1998	324.55	389.46	837	2853	359.70	431.64	2	2
600	10	440	1490	344.26	413.11	650	2220	360.61	432.73	930	3170	399.67	479.60	2	2
660	11	484	1639	378.68	454.42	715	2442	396.67	476.00	1023	3487	439.63	527.56	2	2
720	12	528	1788	413.11	495.73	780	2664	432.73	519.28	1116	3804	479.60	575.52	2	2
780	13	572	1937	447.54	537.04	845	2886	468.79	562.55	1209	4121	519.57	623.48	3	3
840	14	616	2086	481.96	578.35	910	3108	504.85	605.82	1302	4438	559.53	671.44	3	3
900	15	660	2235	516.39	619.67	975	3330	540.91	649.10	1395	4755	599.50	719.40	3	3
960	16	704	2384	550.81	660.98	1040	3552	576.97	692.37	1488	5072	639.47	767.36	3	3
1020	17	748	2533	585.24	702.29	1105	3774	613.03	735.64	1581	5389	679.43	815.32	3	3
1080	18	792	2682	619.67	743.60	1170	3996	649.10	778.91	1674	5706	719.40	836.28	3	3
1140	19	836	2831	654.09	784.91	1235	4218	685.16	822.19	1767	6023	759.37	911.24	3	3
1200	20	880	2980	688.52	826.22	1300	4440	721.22	865.46	1860	6340	799.33	959.20	3	3
1260	21	924	3129	722.94	867.53	1365	4662	757.28	908.73	1953	6657	839.30	1007.16	3	3
1320	22	968	3278	757.37	908.84	1430	4884	793.34	952.01	2046	6974	879.27	1055.12	3	3
1380	23	1012	3427	791.79	950.15	1495	5106	829.40	995.28	2139	7291	919.23	1103.08	3	3
1440	24	1056	3576	826.22	991.46	1560	5328	865.46	1038.55	2232	7608	959.20	1151.04	4	4
1500	25	1100	3725	860.65	1032.78	1625	5550	901.52	1081.83	2325	7925	999.17	1199.00	4	4
1560	26	1144	3874	895.07	1074.09	1690	5772	937.58	1125.10	2418	8242	1039.13	1246.96	4	4
1620	27	1188	4023	929.50	1115.40	1755	5994	973.64	1168.37	2511	8559	1079.10	1294.92	4	4
1680	28	1232	4172	963.92	1156.71	1820	6216	1009.70	1211.64	2604	8876	1119.07	1342.88	4	4
1740	29	1276	4321	998.35	1198.02	1885	6438	1045.76	1254.92	2697	9193	1159.03	1390.84	4	4
1800	30	1320	4470	1032.78	1239.33	1950	6660	1081.83	1298.19	2790	9510	1199.00	1438.80	4	4
1860	31	1364	4619	1067.20	1280.64	2015	6882	1117.89	1341.46	2883	9827	1238.97	1486.76	4	4
1920	32	1408	4768	1101.63	1321.95	2080	7104	1153.95	1384.74	2976	10144	1278.93	1534.72	4	4
1980	33	1452	4917	1136.05	1363.26	2145	7326	1190.01	1428.01	3069	10461	1318.90	1582.68	4	4
2040	34	1496	5066	1170.48	1404.57	2210	7548	1226.07	1471.28	3162	10778	1358.87	1630.64	4	4

Model		4/75				4/95				6/48				No. of stays needed	No. of optional paw feet needed
Length mm	No. of Sections	ΔT50°C		Price ex. VAT (£)	Price incl. VAT (£)	ΔT50°C		Price ex. VAT (£)	Price incl. VAT (£)	ΔT50°C		Price ex. VAT (£)	Price incl. VAT (£)		
		Watts	BTU's			Watts	BTU's			Watts	BTU's				
180	3	324	110.4	133.53	160.23	417	1419	169.77	203.72	285	975	131.35	157.61	2	2
240	4	432	1472	178.03	213.64	556	1892	226.36	271.63	380	1300	175.13	210.15	2	2
300	5	540	1840	222.54	267.05	695	2365	282.95	339.54	475	1625	218.91	262.69	2	2
360	6	648	2208	267.05	320.46	834	2838	339.54	407.44	570	1950	262.69	315.23	2	2
420	7	756	2576	311.56	373.87	973	3311	396.12	475.35	665	2275	306.47	367.77	2	2
480	8	864	2944	356.07	427.28	1112	3784	452.71	543.26	760	2600	350.25	420.30	2	2
540	9	972	3312	400.58	480.69	1251	4257	509.30	611.16	855	2925	394.04	472.84	2	2
600	10	1080	3680	445.08	534.10	1390	4730	565.89	679.07	950	3250	437.82	525.38	2	2
660	11	1188	4048	489.59	587.56	1529	5203	622.48	746.98	1045	3575	481.60	577.92	2	2
720	12	1296	4416	534.10	640.92	1668	5676	679.07	814.88	1140	3900	525.38	630.46	2	2
780	13	1404	4784	578.61	694.33	1807	6149	735.66	882.79	1235	4225	569.16	682.99	3	3
840	14	1512	5152	623.12	747.74	1946	6622	792.25	950.70	1330	4550	612.94	735.53	3	3
900	15	1620	5520	667.63	801.15	2085	7095	848.84	1018.61	1425	4875	656.73	788.07	3	3
960	16	1728	5888	712.13	854.56	2224	7568	905.43	1086.51	1520	5200	700.51	840.61	3	3
1020	17	1836	6256	756.64	907.97	2363	8041	962.02	1154.42	1615	5525	744.29	893.15	3	3
1080	18	1944	6624	801.15	961.38	2502	8514	1018.61	1222.33	1710	5850	788.07	945.68	3	3
1140	19	2052	6992	845.66	1014.79	2641	8987	1075.19	1290.23	1805	6175	831.85	998.22	3	3
1200	20	2160	7360	890.17	1068.20	2780	9460	1131.78	1358.14	1900	6500	875.63	1050.76	3	3
1260	21	2268	7728	934.68	1121.61	2919	9933	1188.37	1426.05	1995	6825	919.42	1103.30	3	3
1320	22	2376	8096	979.18	1175.02	3058	10406	1244.96	1493.95	2090	7150	963.20	1155.84	3	3
1380	23	2484	8464	1023.69	1228.43	3197	10879	1301.55	1561.86	2185	7475	1006.98	1208.37	3	3
1440	24	2592	8832	1068.20	1281.84	3336	11352	1358.14	1629.77	2280	7800	1050.76	1260.91	4	4
1500	25	2700	9200	1112.71	1335.25	3475	11825	1414.73	1697.68	2375	8125	1094.54	1313.45	4	4
1560	26	2808	9568	1157.22	1388.66	3614	12298	1471.32	1765.58	2470	8450	1138.32	1365.99	4	4
1620	27	2916	9936	1201.73	1442.07	3753	12771	1527.91	1833.49	2565	8775	1182.11	1418.53	4	4
1680	28	3024	10304	1246.23	1495.48	3892	13244	1584.50	1901.40	2660	9100	1225.89	1471.06	4	4
1740	29	3132	10672	1290.74	1548.89	4031	13717	1641.09	1969.30	2755	9425	1269.67	1523.60	4	4
1800	30	3240	11040	1335.25	1602.30	4170	14190	1697.68	2037.21	2850	9750	1313.45	1576.14	4	4
1860	31	3348	11408	1379.76	1655.71	4309	14663	1754.26	2105.12	2945	10075	1357.23	1628.68	4	4
1920	32	3456	11776	1424.27	1709.12	4448	15136	1810.85	2173.02	3040	10400	1401.01	1681.22	4	4
1980	33	3564	12144	1468.78	1762.53	4587	15609	1867.44	2240.93	3135	10725	1444.80	1733.75	4	4
2040	34	3672	12512	1513.28	1815.94	4726	16082	1924.03	2308.84	3230	11050	1488.58	1786.29	4	4

FLOREAL

SIZES
96

PRESSURE
TESTED TO
10 BAR

GUARANTEE
10 YEARS

The Floreal is a must for those that like to stand out from the crowd. The stylish look can be complemented with either a plain or patterned finish. Choose from our wide range of size options available (see right) to create that perfect solution and bring your interior to life.



HEIGHT
OPTIONS
750MM/
950MM

SEE CHART TO RIGHT
TO SEE SPECIFIC HEIGHT
OPTIONS

WIDTH
OPTIONS
228MM TO
3800MM

SEE CHART TO RIGHT
TO SEE SPECIFIC WIDTH
OPTIONS



SEE PAGES 7
FOR COLOUR
OPTIONS

Prices start
from under
£290.00
incl. VAT (£)




Patterned finish

CREATE YOUR OWN: FLOREAL

If our most popular sizes don't quite fit your requirements then we can put you in total control to be as creative as you like and design your own solution. Simply select your required height and corresponding model number, and determine your ideal length and number of sections required using the information below. Remember to round up or down your final number of sections as appropriate as the finished radiator can only comprise of finished sections.

DELIVERY
CODE
C

THIS ITEM NORMALLY
DISPATCHED WITHIN
7-10 DAYS OF ORDER



Product Code	Height (h) (mm)	Width (w) (mm)	Depth (d) (mm)	Tapping Centres (mm)		Heat Output Δt50°C		Heat Output Δt60°C	
				c2	c4	Watts	BTU	Watts	BTU
600225	750	77.6	250	157 - 167	582	180	614	228	776
600225P	750	77.6	250	157 - 167	582	180	614	228	776
800225	950	77.6	250	157 - 167	782	219	747	277	944
800225P	950	77.6	250	157 - 167	782	219	747	277	944

Model		600225				600225P				800225				800225P				No. of stays needed
Length mm	No. of Sections	ΔT50°C		Price ex. VAT (£)	Price incl. VAT (£)	ΔT50°C		Price ex. VAT (£)	Price incl. VAT (£)	ΔT50°C		Price ex. VAT (£)	Price incl. VAT (£)	ΔT5 0°C		Price ex. VAT (£)	Price incl. VAT (£)	
		Watts	BTU's			Watts	BTU's			Watts	BTU's			Watts	BTU's			
228	3	540	1842	241.44	289.72	540	1842	249.07	298.88	657	2241	329.18	395.02	657	2241	339.54	407.44	2
304	4	720	2456	321.91	386.30	720	2456	332.09	398.50	876	2988	438.91	526.69	876	2988	452.71	543.26	2
380	5	900	3070	402.39	482.87	900	3070	415.11	498.13	1095	3735	548.63	658.36	1095	3735	565.89	679.07	2
456	6	1080	3684	482.87	579.44	1080	3684	498.13	597.76	1314	4482	658.36	790.03	1314	4482	679.07	814.88	2
532	7	1260	4298	563.35	676.02	1260	4298	581.15	697.38	1533	5229	768.09	921.70	1533	5229	792.25	950.70	2
608	8	1440	4912	643.83	772.59	1440	4912	664.17	797.01	1752	5976	877.81	1053.38	1752	5976	905.43	1086.51	2
684	9	1620	5526	724.31	869.17	1620	5526	747.20	896.63	1971	6723	987.54	1185.05	1971	6723	1018.61	1222.33	2
760	10	1800	6140	804.78	965.74	1800	6140	830.22	996.26	2190	7470	1097.27	1316.72	2190	7470	1131.78	1358.14	2
836	11	1980	6754	885.26	1062.31	1980	6754	913.24	1095.89	2409	8217	1206.99	1448.39	2409	8217	1244.96	1493.95	2
912	12	2160	7368	965.74	1158.89	2160	7368	996.26	1195.51	2628	8964	1316.72	1580.06	2628	8964	1358.14	1629.77	2
988	13	2340	7982	1046.22	1255.46	2340	7982	1079.28	1295.14	2847	9711	1426.45	1711.74	2847	9711	1471.32	1765.58	3
1064	14	2520	8596	1126.70	1352.04	2520	8596	1162.30	1394.76	3066	10458	1536.17	1843.41	3066	10458	1584.50	1901.40	3
1140	15	2700	9210	1207.18	1448.61	2700	9210	1245.33	1494.39	3285	11205	1645.90	1975.08	3285	11205	1697.68	2037.21	3
1216	16	2880	9824	1287.65	1545.18	2880	9824	1328.35	1594.02	3504	11952	1755.63	2106.75	3504	11952	1810.85	2173.02	3
1292	17	3060	10438	1368.13	1641.76	3060	10438	1411.37	1693.64	3723	12699	1865.35	2238.42	3723	12699	1924.03	2308.84	3
1368	18	3240	11052	1448.61	1738.33	3240	11052	1494.39	1793.27	3942	13446	1975.08	2370.10	3942	13446	2037.21	2444.65	3
1444	19	3420	11666	1529.09	1834.91	3420	11666	1577.41	1892.89	4161	14193	2084.81	2501.77	4161	14193	2150.39	2580.47	3
1520	20	3600	12280	1609.57	1931.48	3600	12280	1660.43	1992.52	4380	14940	2194.53	2633.44	4380	14940	2263.57	2716.28	3
1596	21	3780	12894	1690.05	2028.05	3780	12894	1743.46	2092.15	4599	15687	2304.26	2765.11	4599	15687	2376.75	2852.09	3
1672	22	3960	13508	1770.52	2124.63	3960	13508	1826.48	2191.77	4818	16434	2413.99	2896.78	4818	16434	2489.92	2987.91	3
1748	23	4140	14122	1851.00	2221.20	4140	14122	1909.50	2291.40	5037	17181	2523.71	3028.46	5037	17181	2603.10	3123.10	3
1824	24	4320	14736	1931.48	2317.78	4320	14736	1992.52	2391.02	5256	17928	2633.44	3160.13	5256	17928	2716.28	3259.54	4
1900	25	4500	15350	2011.96	2414.35	4500	15350	2075.54	2490.65	5475	18675	2743.17	3291.80	5475	18675	2829.46	3395.35	4
1976	26	4680	15964	2092.44	2510.92	4680	15964	2158.56	2590.28	5694	19422	2852.89	3423.47	5694	19422	2942.64	3531.16	4
2052	27	4860	16578	2172.92	2607.50	4860	16578	2241.59	2689.90	5913	20169	2962.62	3555.14	5913	20169	3055.82	3666.98	4
2128	28	5040	17192	2253.39	2704.07	5040	17192	2324.61	2789.53	6132	20916	3072.35	3686.82	6132	20916	3168.99	3802.79	4
2204	29	5220	17806	2333.87	2800.65	5220	17806	2407.63	2889.15	6351	21663	3182.07	3818.49	6351	21663	3282.17	3938.61	4
2280	30	5400	18420	2414.35	2897.22	5400	18420	2490.65	2988.78	6570	22410	3291.80	3950.16	6570	22410	3395.35	4074.42	4
2356	31	5580	19034	2494.83	2993.79	5580	19034	2573.67	3088.41	6789	23157	3401.53	4081.83	6789	23157	3508.53	4210.23	4
2432	32	5760	19648	2575.31	3090.37	5760	19648	2656.69	3188.03	7008	23904	3511.25	4213.50	7008	23904	3621.71	4346.05	4
2508	33	5940	20262	2655.79	3186.94	5940	20262	2739.72	3287.66	7227	24651	3620.98	4345.18	7227	24651	3734.89	4481.86	4
2584	34	6120	20876	2736.26	3283.52	6120	20876	2822.74	3387.28	7446	25398	3730.71	4476.85	7446	25398	3848.06	4617.68	4

For pricing and data on larger radiators please contact the Sales Office.

Fittings: Retaining stay (RS) - £9.05 each incl. VAT (£7.54 ex. VAT). Joining key - £137.23 each incl. VAT (£114.36 ex. VAT). Brass air vent - £5.56 each incl. VAT (£4.63 ex. VAT).

Supplied in dark grey RAL 7022 primer for over painting. RAL colour finishing available POA. Maximum factory assembled sections = 15 on site. Assembly required thereafter. Special Note: Cast Iron radiators are not a finished product, it is advised all sections should be tightened on site prior to installation. 'P' after codes denotes patterned finish. Centres = number of sections x 76mm + 20mm.

NOSTALGIA

SIZES
144

PRESSURE
TESTED TO
10 BAR

GUARANTEED
10
YEARS

This popular cast iron radiator combines a flowing elegance with versatility and choice. Creating a real focal point in your chosen room, the Nostalgia is available in a patterned finish and a wide variety of size options. Either choose from our most popular range of standard designs or create your own solution.

DELIVERY
CODE
A

THIS ITEM IS NORMALLY
DISPATCHED WITHIN
48 HOURS OF ORDER

HEIGHT
OPTIONS
660MM TO
954MM

SEE CHART ON PAGE
14-15 TO SEE SPECIFIC
HEIGHT OPTIONS

WIDTH
OPTIONS
228MM TO
3800MM

SEE CHART ON PAGE
14-15 TO SEE SPECIFIC
WIDTH OPTIONS



SEE PAGES 7
FOR COLOUR
OPTIONS

Prices start
from under
£214.00
incl. VAT (£)

Electric only option available

£POA
PRICE ON
APPLICATION

CHOOSE YOUR OWN: NOSTALGIA


At Kartell, we know what our customers want. We have detailed below our most popular size options for you to browse. These radiators fit perfectly in any room, whether it is a bathroom, kitchen or hallway, and offers you an 'off the shelf' solution with quicker delivery times and a more efficient all-round service. Simply choose the option that works best for you and place your order using the order code and pricing information specified below.

CREATE
YOUR OWN
SOLUTION

SEE PAGE
42

(H) 760 x (W) 456 x (D) 180		(H) 954 x (W) 456 x (D) 180	
Product Code 600/180/6 £477.86 incl. VAT £398.21 (ex. VAT)		Product Code 800/180/6 £645.06 incl. VAT £537.55 (ex. VAT)	

Product Code	Tapping Centres (mm)		No. of sections	Heat Output Δt50°C		Heat Output Δt60°C		Price ex. VAT (£)	Price incl. VAT (£)
	(c1)	(c2)		Watts	BTU	Watts	BTU		
600/180/6	476	122/132	6	726	2478	918	3132	398.21	477.86
800/180/6	476	122/132	6	906	3090	1145	3906	537.55	645.06

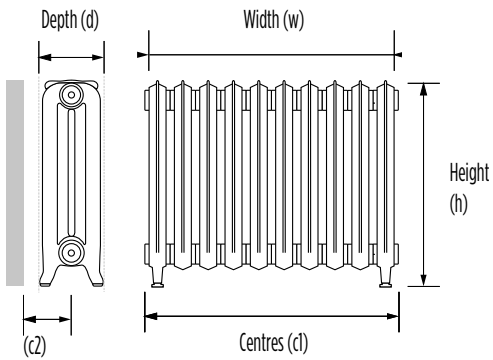

- Off the shelf radiators – details.
- List prices includes retaining stays, tapping bushes & air vent
 - Supplied in dark grey primer (RAL7022) for over painting. RAL colour finish available POA.
 - All items available immediately
 - Centre (c1) = number of sections x 76mm + 20mm

NOSTALGIA VALVES


The Nostalgia valves are the perfect accompaniment to the traditional radiator. Made in solid brass, it combines modern efficiency with a period design.

Product Code	Description	Price ex. VAT (£)	Price incl. VAT (£)
VLVCHA-AB1	15mm Angled Manual pair	67.50	81.00
VLVCHA-TRV	15mm Angled TRV pair	81.00	97.20



	A	B	C	D
Nostalgia 15mm Angle				
WH	55	49	67	40
LS	55	32	48	40
Nostalgia 15mm Angle TRV				
WH	55	49	100	40
LS	55	32	48	40
Nostalgia 1/2" BSP Angle				
WH	62	49	68	25
LS	62	32	68	25
Nostalgia 15mm Angle				
WH	63	49	65	30
LS	63	32	45	30

Typical valve dimensions

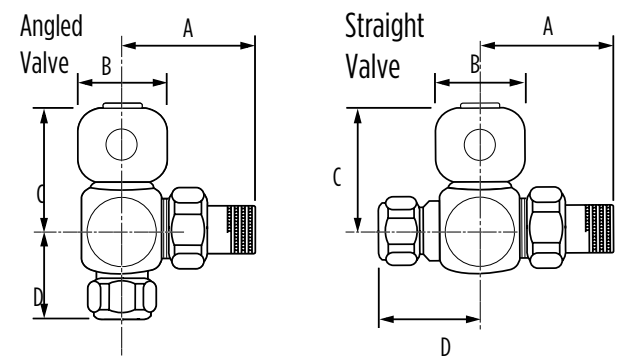


CREATE YOUR OWN: NOSTALGIA

If our most popular sizes don't quite fit your requirements then we can put you in total control to be as creative as you like and design your own solution. Simply select your required height and corresponding model number, and determine your ideal length and number of sections required using the information below. Remember to round up or down your final number of sections as appropriate as the finished radiator can only comprise of finished sections.

DELIVERY CODE
C

THIS ITEM NORMALLY
DISPATCHED WITHIN
7-10 DAYS OF ORDER



Product Code (Heating Only)	Height (mm) (h)	Width (mm) (w)	Depth (mm)	Tapping Centres (mm)		Heat Output Δt50°C		Heat Output Δt60°C	
				(c1)	(c2)	Watts	BTU	Watts	BTU
Nostalgia (Floor Standing) – details per section									
500180	660	76	180	500	122/132	111	379	141	480
600180	760	76	180	600	122/132	121	413	153	523
800180	954	76	180	795	122/132	151	515	191	653

Model		500180				600180				800180				No. of stays needed
Length mm	No. of Sections	ΔT50°C		Price	Price	ΔT50°C		Price	Price	ΔT50°C		Price	Price	
		Watts	BTU's	ex. VAT (£)	incl. VAT (£)	Watts	BTU's	ex. VAT (£)	incl. VAT (£)	Code	BTU's	ex. VAT (£)	incl. VAT (£)	
228	3	333	1137	177.67	213.20	363	1239	191.57	229.88	453	1545	261.33	313.59	2
304	4	444	1516	236.89	284.27	484	1652	255.42	306.51	604	2060	348.44	418.12	2
380	5	555	1895	296.12	355.34	605	2065	319.28	383.14	755	2575	435.55	522.66	2
456	6	666	2274	355.34	426.41	726	2478	383.14	459.76	906	3090	522.66	627.19	2
532	7	777	2653	414.56	497.48	847	2891	446.99	536.39	1057	3605	609.76	731.72	2
608	8	888	3032	473.79	568.54	968	3304	510.85	613.02	1208	4120	696.87	836.25	2
684	9	999	3411	533.01	639.61	1089	3717	574.70	689.64	1359	4635	783.98	940.78	2
760	10	1110	3790	592.23	710.68	1210	4130	638.56	766.27	1510	5150	871.09	1045.31	2
836	11	1221	4169	651.46	781.75	1331	4543	702.41	842.90	1661	5665	958.20	1149.84	2
912	12	1332	4548	710.68	852.82	1452	4956	766.27	919.52	1812	6180	1045.31	1254.37	3
988	13	1443	4927	769.90	923.88	1573	5369	830.13	996.15	1963	6695	1132.42	1358.90	3
1064	14	1554	5306	829.13	994.95	1694	5782	893.98	1072.78	2114	7210	1219.53	1463.43	3
1140	15	1665	5685	888.35	1066.02	1815	6195	957.84	1149.41	2265	7725	1306.64	1567.97	3
1216	16	1776	6064	947.57	1137.09	1936	6608	1021.96	1226.03	2416	8240	1393.75	1672.50	3
1292	17	1887	6443	1006.80	1208.16	2057	7021	1085.55	1302.66	2567	8755	1480.86	1777.03	3
1368	18	1998	6822	1066.02	1279.22	2178	7434	1149.41	1379.29	2718	9270	1567.97	1881.56	3
1444	19	2109	7201	1125.24	1350.29	2299	7847	1213.26	1455.91	2869	9785	1655.07	1986.09	3
1520	20	2220	7580	1184.47	1421.36	2420	8260	1277.12	1532.54	3020	10300	1742.18	2090.62	3
1596	21	2331	7959	1243.69	1492.43	2541	8673	1340.97	1609.17	3171	10815	1829.29	2195.15	3
1672	22	2442	8338	1302.91	1563.50	2662	9086	1404.83	1685.79	3322	11330	1916.40	2299.68	3
1748	23	2553	8717	1362.14	1634.56	2783	9499	1468.68	1762.42	3473	11845	2003.51	2404.21	3
1824	24	2664	9096	1421.36	1705.63	2904	9912	1532.54	1839.05	3624	12360	2090.62	2508.74	4
1900	25	2775	9475	1480.58	1776.70	3025	10325	1596.40	1915.68	3775	12875	2177.73	2613.28	4
1976	26	2886	9854	1539.81	1847.77	3146	10738	1660.25	1992.30	3926	13390	2264.84	2717.81	4
2052	27	2997	10233	1599.03	1918.84	3267	11151	1724.11	2068.93	4077	13905	2351.95	2822.34	4
2128	28	3108	10612	1658.25	1989.90	3388	11564	1787.96	2145.56	4228	14420	2439.06	2926.87	4
2204	29	3219	10991	1717.48	2060.97	3509	11977	1851.82	2222.18	4379	14935	2526.17	3031.40	4
2280	30	3330	11370	1776.70	2132.04	3630	12390	1915.68	2298.81	4530	15450	2613.28	3135.93	4

For pricing and data on larger radiators, please contact the Sales Office.

Centre (c1) = number of sections x 76mm + 20mm

STEP BY STEP GUIDE: HOW TO BUILD A CAST IRON RADIATOR

1. Measure the width and height of the space you have to fit the radiator in, or calculate the output you require in your room
2. Use the tables above to work out which radiator fits your size requirements
3. Check how many retaining stays are required
5. Ensure you have a joining key to check all joints are tight before installing
6. If the radiator is over 12 sections you will also need the joining key to join the sections together. All other joining accessories will be supplied
7. Decide if you want the radiator painted and if so pick a colour from the RAL chart on pages 6-7
8. Place your order with your local supplier

Online: www.kartelluk.com

SIZES	MATERIAL	COLOUR	PRESSURE TESTED TO	GUARANTEE
6	STEEL	CHROME	10 BAR	5 YEARS




KARTELL^{UK}
CUSTOMER CHOICE

G4KRAIL512

Height
1200mm
X
Width
500mm

£90.00
inc. VAT

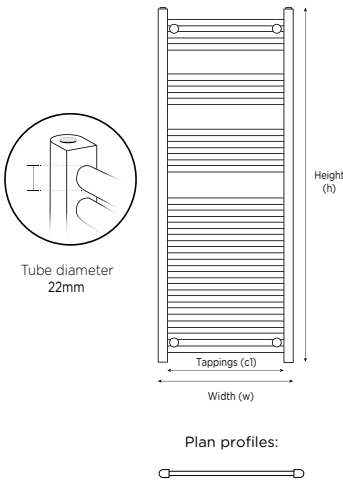

G4K RAILS 22mm

Our G4K Rails effortlessly combine quality and a contemporary style with optimum performance and value. The 22mm range is perfect for smaller spaces, and those on a budget.

DELIVERY CODE A
THIS ITEM NORMALLY
DISPATCHED WITHIN
48 HOURS OF ORDER

**HEIGHT
OPTIONS
800MM
1200MM
1600MM**

**WIDTH
OPTIONS
500MM OR
600MM**

**TUBE
DIAMETER
22MM**

Prices start
from
£66.90
inc. VAT

Product Code (heating only)	Height (mm) (h)	Width (mm) (w)	Quantity Cross Rails	Tapping Centre (mm)		Heat Output ΔT50°		Heat Output ΔT60°		Price ex. VAT (£)	Price incl. VAT (£)
				(c1)	(c2)	Watts	BTUs	Watts	BTU's		
Straight											
G4KRAIL508	800	500	12	455	64-86	229	782	293	1001	55.75	66.90
G4KRAIL512	1200	500	17	455	64-86	331	1131	424	1448	75.00	90.00
G4KRAIL516	1600	500	22	555	64-86	434	1481	556	1896	107.50	129.00
G4KRAIL608	800	600	12	455	52-74	263	899	337	1151	62.50	75.00
G4KRAIL612	1200	600	17	455	52-74	380	1298	487	1661	81.25	97.50
G4KRAIL616	1600	600	22	555	52-74	497	1697	637	2172	125.00	150.00

Notes: Supplied complete with fixing kit, including plugs and vents. Manufactured under BS EN ISO 9001 quality standards. Pressure tested to 10 bar / maximum working pressure 7 bar.

Online: www.kartelluk.com

K RAILS 22 CHROME

Our K Rails effortlessly combine quality and a contemporary style with optimum performance and value. The 22mm range is perfect for family bathrooms, offering great value and sleek design.



DELIVERY CODE
A

THIS ITEM NORMALLY
DISPATCHED WITHIN
48 HOURS OF ORDER



**HEIGHT
OPTIONS
800MM TO
1800MM**

**WIDTH
OPTIONS
300MM TO
600MM**

**TUBE
DIAMETER
22MM**


Prices start
from under
£71.00
inc. VAT

**IDEAL
FOR FAMILY
BATHROOMS**

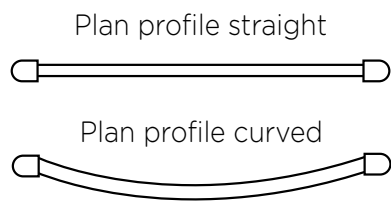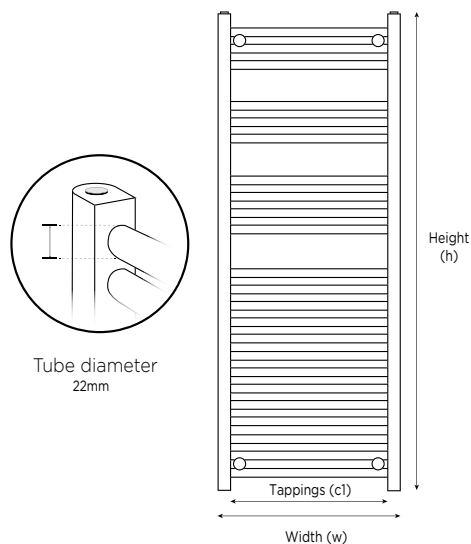

KARTELL^{UK}

**CUSTOMER
CHOICE**

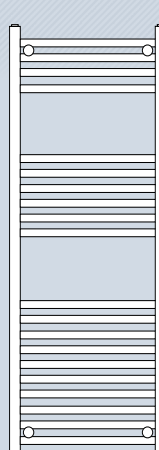

STR512C

**Height
1200mm
x
Width
500mm**

£107.80
inc. VAT

K RAILS: STANDARD PRODUCT RANGE

SIZES	MATERIAL	COLOUR	PRESSURE TESTED TO	GUARANTEE
18	STEEL	CHROME	10 BAR	5 YEARS

HEIGHT (h): 800MM



Available in both straight and curved profiles

HEIGHT (h): 1000MM




Available in both straight and curved profiles

HEIGHT (h): 1200MM




Available in both straight and curved profiles

HEIGHT (h): 1600MM



Available in both straight and curved profiles

HEIGHT (h): 1800MM



Available in both straight and curved profiles

Product Code	Width (mm) (w)	Quantity of Cross Rails	Tapping Centre (mm)		Heat Output $\Delta 150^{\circ}\text{C}$		Heat Output $\Delta 160^{\circ}\text{C}$		Price ex. VAT (£)	Price ind. VAT (£)
			(c1)	(c2)	Watts	BTU	Watts	BTU		
STRAIGHT										
STR308C	300	14	255	64-86	222	757	281	957	59.08	70.90
STR408C	400	14	355	64-86	255	870	322	1,100	62.50	75.00
STR508C	500	14	455	64-86	302	1,030	382	1,302	67.25	80.70
STR608C	600	14	555	64-86	350	1,194	442	1,509	71.92	86.30
CURVED										
CTR308C	300	14	255	52-74	222	757	281	957	62.58	75.10
CTR408C	400	14	355	52-74	255	870	322	1,100	66.50	79.80
CTR508C	500	14	455	52-74	302	1,030	382	1,302	71.25	85.50
CTR608C	600	14	555	52-74	350	1,194	442	1,509	75.92	91.10

Product Code	Width (mm) (w)	Quantity of Cross Rails	Tapping Centre (mm)		Heat Output $\Delta 150^{\circ}\text{C}$		Heat Output $\Delta 160^{\circ}\text{C}$		Price ex. VAT (£)	Price ind. VAT (£)
			(c1)	(c2)	Watts	BTU	Watts	BTU		
STRAIGHT										
STR310C	300	16	255	64-86	264	902	334	1,140	69.33	83.20
STR410C	400	16	355	64-86	304	1,037	384	1,311	73.33	88.00
STR510C	500	16	455	64-86	357	1,218	451	1,540	79.92	95.90
STR610C	600	16	555	64-86	413	1,409	522	1,781	82.83	99.40
CURVED										
CTR310C	300	16	255	52-74	264	902	334	1,140	73.50	88.20
CTR410C	400	16	355	52-74	304	1,037	384	1,311	77.75	93.30
CTR510C	500	16	455	52-74	357	1,218	451	1,540	84.75	101.70
CTR610C	600	16	555	52-74	413	1,409	522	1,781	87.75	105.30

Product Code	Width (mm) (w)	Quantity of Cross Rails	Tapping Centre (mm)		Heat Output $\Delta 150^{\circ}\text{C}$		Heat Output $\Delta 160^{\circ}\text{C}$		Price ex. VAT (£)	Price ind. VAT (£)
			(c1)	(c2)	Watts	BTU	Watts	BTU		
STRAIGHT										
STR312C	300	20	255	64-86	322	1,098	407	1,388	77.25	92.70
STR412C	400	20	355	64-86	370	1,262	468	1,595	81.75	98.10
STR512C	500	20	455	64-86	436	1,488	551	1,881	89.93	107.80
STR612C	600	20	555	64-86	506	1,726	640	2,182	95.50	114.60
CURVED										
CTR312C	300	20	255	52-74	322	1,098	407	1,388	81.83	98.20
CTR412C	400	20	355	52-74	370	1,262	468	1,595	86.67	104.00
CTR512C	500	20	455	52-74	436	1,488	551	1,881	95.17	114.20
CTR612C	600	20	555	52-74	506	1,726	640	2,182	101.25	121.50

Product Code	Width (mm) (w)	Quantity of Cross Rails	Tapping Centre (mm)		Heat Output $\Delta 150^{\circ}\text{C}$		Heat Output $\Delta 160^{\circ}\text{C}$		Price ex. VAT (£)	Price ind. VAT (£)
			(c1)	(c2)	Watts	BTU	Watts	BTU		
STRAIGHT										
STR316C	300	26	255	64-86	425	1,452	537	1,835	94.75	113.70
STR416C	400	26	355	64-86	489	1,668	618	2,108	100.25	120.30
STR516C	500	26	455	64-86	576	1,965	728	2,484	109.67	131.60
STR616C	600	26	555	64-86	668	2,279	844	2,881	116.75	140.10
CURVED										
CTR316C	300	26	255	52-74	425	1,452	537	1,835	100.42	120.50
CTR416C	400	26	355	52-74	489	1,668	618	2,108	104.25	125.10
CTR516C	500	26	455	52-74	576	1,965	728	2,484	113.67	136.40
CTR616C	600	26	555	52-74	668	2,279	844	2,881	120.75	144.90

Product Code	Width (mm) (w)	Quantity of Cross Rails	Tapping Centre (mm)		Heat Output $\Delta 150^{\circ}\text{C}$		Heat Output $\Delta 160^{\circ}\text{C}$		Price ex. VAT (£)	Price ind. VAT (£)
			(c1)	(c2)	Watts	BTU	Watts	BTU		
STRAIGHT										
STR518C	500	31	255	64-86	662	2,259	837	2,855	138.00	165.60
STR618C	600	31	555	64-86	768	2,620	971	3,312	150.75	180.90
CURVED										
CTR518C	500	31	255	52-74	662	2,259	837	2,855	146.25	175.50
CTR618C	600	31	555	52-74	768	2,620	971	3,312	159.75	191.70

Notes: Supplied complete with fixing kit, including plugs and vents. Manufactured under BS EN ISO 9001 quality standards. Pressure tested to 10 bar / maximum working pressure 7 bar.

K RAILS 22 WHITE

Our K Rails effortlessly combine quality and a contemporary style with optimum performance and value. The 22mm range is perfect for family bathrooms, offering great value and sleek design.



DELIVERY CODE
A

THIS ITEM NORMALLY
DISPATCHED WITHIN
48 HOURS OF ORDER

HEIGHT
OPTIONS
800MM TO
1800MM

WIDTH
OPTIONS
300MM TO
600MM



TUBE
DIAMETER
22MM



SEE PAGES 7
FOR COLOUR
OPTIONS

Prices start
from under
£49.00
inc. VAT

IDEAL
FOR FAMILY
BATHROOMS

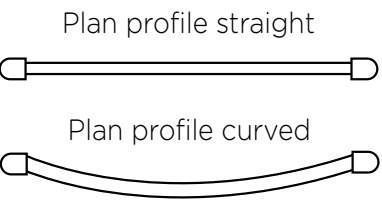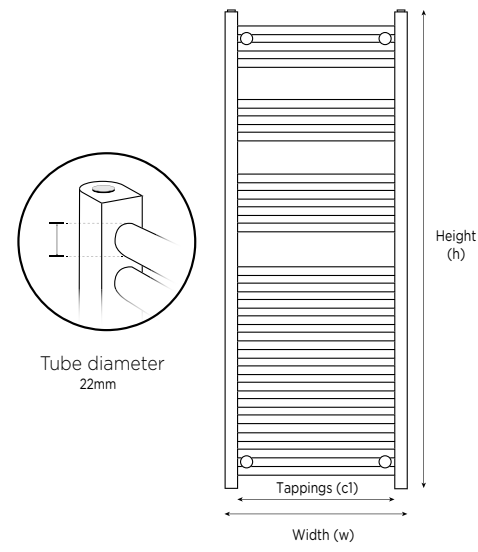

KARTELL^{UK}
CUSTOMER CHOICE

CTR612W

Height
1200mm
X
Width
500mm

£83.80
inc. VAT

K RAILS: STANDARD PRODUCT RANGE

SIZES	MATERIAL	COLOUR	PRESSURE TESTED TO	GUARANTEE
18	STEEL	WHITE	10 BAR	5 YEARS

HEIGHT (h): 800MM

Available in both straight and curved profiles

HEIGHT (h): 1000MM

Available in both straight and curved profiles

HEIGHT (h): 1200MM

Available in both straight and curved profiles

HEIGHT (h): 1600MM

Available in both straight and curved profiles

HEIGHT (h): 1800MM

Available in both straight and curved profiles

Product Code	Width (mm) (w)	Quantity of Cross Rails	Tapping Centre (mm)		Heat Output $\Delta 150^{\circ}\text{C}$		Heat Output $\Delta 160^{\circ}\text{C}$		Price ex. VAT (£)	Price incl. VAT (£)
			(c1)	(c2)	Watts	BTU	Watts	BTU		
STRAIGHT										
STR308W	300	14	255	64-86	316	1,079	399	1,364	40.75	48.90
STR408W	400	14	355	64-86	363	1,240	459	1,567	43.08	51.70
STR508W	500	14	455	64-86	430	1,468	544	1,856	46.42	55.70
STR608W	600	14	555	64-86	499	1,702	631	2,151	49.67	59.60
CURVED										
CTR308W	300	14	255	52-74	316	1,079	399	1,364	43.17	51.80
CTR408W	400	14	355	52-74	363	1,240	459	1,567	45.92	55.10
CTR508W	500	14	455	52-74	430	1,468	544	1,856	49.17	59.00
CTR608W	600	14	555	52-74	499	1,702	631	2,151	52.42	62.90

Product Code	Width (mm) (w)	Quantity of Cross Rails	Tapping Centre (mm)		Heat Output Δ150°C		Heat Output Δ160°C		Price ex. VAT (£)	Price incl. VAT (£)
			(c1)	(c2)	Watts	BTU	Watts	BTU		
STRAIGHT										
STR310W	300	16	255	64-86	377	1,286	477	1,626	47.83	57.40
STR410W	400	16	355	64-86	433	1,478	547	1,868	50.58	60.70
STR510W	500	16	455	64-86	509	1,736	643	2,194	55.17	66.20
STR610W	600	16	555	64-86	589	2,008	744	2,538	57.17	68.60
CURVED										
CTR310W	300	16	255	52-74	377	1,286	477	1,626	50.67	60.80
CTR410W	400	16	355	52-74	433	1,478	547	1,868	53.67	64.40
CTR510W	500	16	455	52-74	509	1,736	643	2,194	58.50	70.20
CTR610W	600	16	555	52-74	589	2,008	744	2,538	60.58	72.70

Product Code	Width (mm) (w)	Quantity of Cross Rails	Tapping Centre (mm)		Heat Output $\Delta 150^{\circ}\text{C}$		Heat Output $\Delta 160^{\circ}\text{C}$		Price ex. VAT (£)	Price incl. VAT (£)
			(c1)	(c2)	Watts	BTU	Watts	BTU		
STRAIGHT										
STR312W	300	20	255	64-86	459	1,565	580	1,978	53.33	64.00
STR412W	400	20	355	64-86	527	1,799	666	2,274	56.42	67.70
STR512W	500	20	455	64-86	621	2,120	785	2,680	62.00	74.40
STR612W	600	20	555	64-86	721	2,460	911	3,109	65.92	79.10
CURVED										
CTR312W	300	20	255	52-74	459	1,565	580	1,978	56.50	67.80
CTR412W	400	20	355	52-74	527	1,799	666	2,274	59.75	71.70
CTR512W	500	20	455	52-74	621	2,120	785	2,680	65.67	78.80
CTR612W	600	20	555	52-74	721	2,460	911	3,109	69.83	83.80

Product Code	Width (mm) (w)	Quantity of Cross Rails	Tapping Centre (mm)		Heat Output $\Delta 150^{\circ}\text{C}$		Heat Output $\Delta 160^{\circ}\text{C}$		Price ex. VAT (£)	Price incl. VAT (£)
			(c1)	(c2)	Watts	BTU	Watts	BTU		
STRAIGHT										
STR316W	300	26	255	64-86	606	2,068	766	2,614	65.33	78.40
STR416W	400	26	355	64-86	697	2,378	881	3,006	69.17	83.00
STR516W	500	26	455	64-86	821	2,801	1,038	3,540	75.67	90.80
STR616W	600	26	555	64-86	952	3,248	1,203	4,105	80.58	96.70
CURVED										
CTR316W	300	26	255	52-74	606	2,068	766	2,614	69.25	83.10
CTR416W	400	26	355	52-74	697	2,378	881	3,006	71.92	86.30
CTR516W	500	26	455	52-74	821	2,801	1,038	3,540	78.42	94.10
CTR616W	600	26	555	52-74	952	3,248	1,203	4,105	83.33	100.00

Product Code	Width (mm) (w)	Quantity of Cross Rails	Tapping Centre (mm)		Heat Output $\Delta 150^{\circ}\text{C}$		Heat Output $\Delta 160^{\circ}\text{C}$		Price ex. VAT (£)	Price incl. VAT (£)
			(c1)	(c2)	Watts	BTU	Watts	BTU		
STRAIGHT										
STR518W	500	31	255	64-86	943	3,219	1,192	4,069	95.25	114.30
STR618W	600	31	555	64-86	1,094	3,734	1,383	4,720	104.00	124.80
CURVED										
CTR518W	500	31	255	52-74	943	3,219	1,192	4,069	100.92	121.10
CTR618W	600	31	555	52-74	1,094	3,734	1,383	4,720	110.25	132.30

Notes: Supplied complete with fixing kit, including plugs and vents. Manufactured under BS EN ISO 9001 quality standards. Pressure tested to 10 bar / maximum working pressure 7 bar.

K RAILS NEW 25 CHROME

Our K Rails effortlessly combine quality and a contemporary style with optimum performance and value. The new 25mm range offers high outputs, perfect for busy family bathrooms.



DELIVERY CODE
A

THIS ITEM NORMALLY
DISPATCHED WITHIN
48 HOURS OF ORDER



HEIGHT
OPTIONS
800MM TO
1800MM

WIDTH
OPTIONS
300MM TO
600MM

TUBE
DIAMETER
25MM

Prices start
from under
£95.00
inc. VAT

IDEAL
FOR FAMILY
BATHROOMS

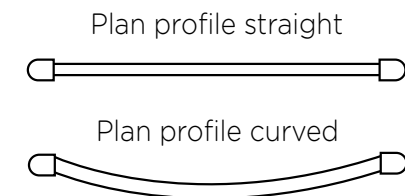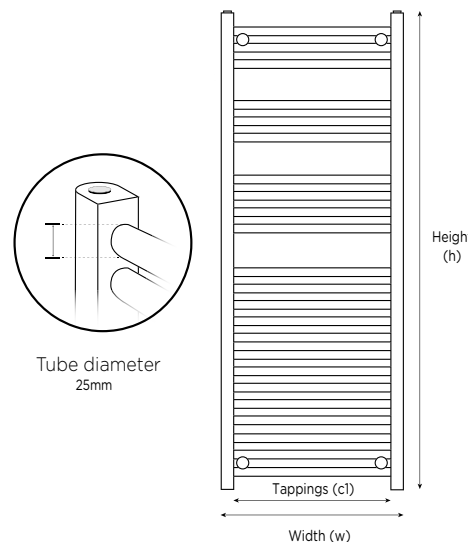

KARTELL^{UK}
CUSTOMER CHOICE

25STR616C

Height
1600mm
x
Width
600mm

£164.30
inc. VAT

K RAILS: NEW 25MM PRODUCT RANGE

SIZES	MATERIAL	COLOUR	PRESSURE TESTED TO	GUARANTEE
12	STEEL	CHROME	10 BAR	5 YEARS

HEIGHT (h): 800MM

Available in both straight and curved profiles

HEIGHT (h): 1000MM

Available in both straight and curved profiles

HEIGHT (h): 1200MM

Available in both straight and curved profiles

HEIGHT (h): 1600MM

Available in both straight and curved profiles

HEIGHT (h): 1800MM

Available in both straight and curved profiles

Product Code	Width (mm) (w)	Quantity of Cross Rails	Tapping Centre (mm)		Heat Output $\Delta 150^{\circ}\text{C}$		Heat Output $\Delta 160^{\circ}\text{C}$		Price ex. VAT (£)	Price incl. VAT (£)
			(c1)	(c2)	Watts	BTU	Watts	BTU		
STRAIGHT										
25STR308C	300	14	255	64-86	256	873	324	1,106	78.58	94.30
25STR408C	400	14	355	64-86	294	1,004	373	1,272	81.42	97.70
25STR508C	500	14	455	64-86	348	1,189	441	1,506	87.92	105.50
25STR608C	600	14	555	64-86	404	1,378	512	1,746	90.67	108.80
CURVED										
25CTR308C	300	14	255	52-74	256	873	324	1,106	83.25	99.90
25CTR408C	400	14	355	52-74	294	1,004	373	1,272	86.00	103.20
25CTR508C	500	14	455	52-74	348	1,189	441	1,506	97.17	116.60
25CTR608C	600	14	555	52-74	404	1,378	512	1,746	99.92	119.90

Product Code	Width (mm) (w)	Quantity of Cross Rails	Tapping Centre (mm)		Heat Output $\Delta 150^{\circ}\text{C}$		Heat Output $\Delta 160^{\circ}\text{C}$		Price ex. VAT (£)	Price incl. VAT (£)
			(c1)	(c2)	Watts	BTU	Watts	BTU		
STRAIGHT										
25STR310C	300	16	255	64-86	305	1,041	387	1,319	87.92	105.50
25STR410C	400	16	355	64-86	351	1,197	444	1,516	90.67	108.80
25STR510C	500	16	455	64-86	436	1,488	551	1,781	97.17	116.60
25STR610C	600	16	555	64-86	476	1,626	604	2,060	99.92	119.90
CURVED										
25CTR310C	300	16	255	52-74	305	1,041	387	1,319	92.50	111.00
25CTR410C	400	16	355	52-74	351	1,197	444	1,516	95.25	114.30
25CTR510C	500	16	455	52-74	436	1,488	551	1,781	101.75	122.10
25CTR610C	600	16	555	52-74	476	1,626	604	2,060	104.50	125.40

Product Code	Width (mm) (w)	Quantity of Cross Rails	Tapping Centre (mm)		Heat Output $\Delta 150^{\circ}\text{C}$		Heat Output $\Delta 160^{\circ}\text{C}$		Price ex. VAT (£)	Price incl. VAT (£)
			(c1)	(c2)	Watts	BTU	Watts	BTU		
STRAIGHT										
25STR312C	300	20	255	64-86	371	1,267	471	1,605	97.17	116.60
25STR412C	400	20	355	64-86	427	1,456	541	1,845	99.92	119.90
25STR512C	500	20	455	64-86	4503	1,716	637	2,175	106.33	127.60
25STR612C	600	20	555	64-86	584	1,992	740	2,524	109.17	131.00
CURVED										
25CTR312C	300	20	255	52-74	371	1,267	471	1,605	101.75	122.10
25CTR412C	400	20	355	52-74	427	1,456	541	1,845	104.50	125.40
25CTR512C	500	20	455	52-74	4503	1,716	637	2,175	111.00	133.20
25CTR612C	600	20	555	52-74	584	1,992	740	2,524	113.75	136.50

Product Code	Width (mm) (w)	Quantity of Cross Rails	Tapping Centre (mm)		Heat Output $\Delta 150^{\circ}\text{C}$		Heat Output $\Delta 160^{\circ}\text{C}$		Price ex. VAT (£)	Price incl. VAT (£)
			(c1)	(c2)	Watts	BTU	Watts	BTU		
STRAIGHT										
25STR316C	300	26	255	64-86	491	1,675	622	2,122	115.67	138.80
25STR416C	400	26	355	64-86	564	1,925	713	2,439	118.42	142.10
25STR516C	500	26	455	64-86	665	2,630	968	3,302	124.92	149.90
25STR616C	600	26	555	64-86	771	2,606	976	3,332	136.92	164.30
CURVED										
25CTR316C	300	26	255	52-74	491	1,675	622	2,122	124.92	149.90
25CTR416C	400	26	355	52-74	564	1,925	713	2,439	127.67	153.20
25CTR516C	500	26	455	52-74	665	2,630	968	3,302	134.08	160.90
25CTR616C	600	26	555	52-74	771	2,606	976	3,332	146.17	175.40

Product Code	Width (mm) (w)	Quantity of Cross Rails	Tapping Centre (mm)		Heat Output $\Delta 150^{\circ}\text{C}$		Heat Output $\Delta 160^{\circ}\text{C}$		Price ex. VAT (£)	Price incl. VAT (£)
			(c1)	(c2)	Watts	BTU	Watts	BTU		
STRAIGHT										
25STR518C	500	31	455	64-86	764	2,606	968	3,302	161.83	194.20
25STR618C	600	31	555	64-86	886	3,023	1,123	3,830	173.92	208.70
CURVED										
25CTR518C	500	31	455	52-74	764	2,606	968	3,302	171.17	205.40
25CTR618C	600	31	555	52-74	886	3,023	1,123	3,830	183.17	219.80

Notes: Supplied complete with fixing kit, including plugs and vents. Manufactured under BS EN ISO 9001 quality standards. Pressure tested to 10 bar / maximum working pressure 7 bar.

ELECTRIC RAILS

Available as a straight or curved design with a sparkling, highly polished chrome finish.


DELIVERY CODE
A
THIS ITEM NORMALLY
DISPATCHED WITHIN
48 HOURS OF ORDER

HEIGHT
OPTIONS
800MM TO
1200MM

WIDTH
OPTIONS
500MM OR
600MM

TUBE
DIAMETER
22MM

Prices start
from under
£179.00
inc. VAT


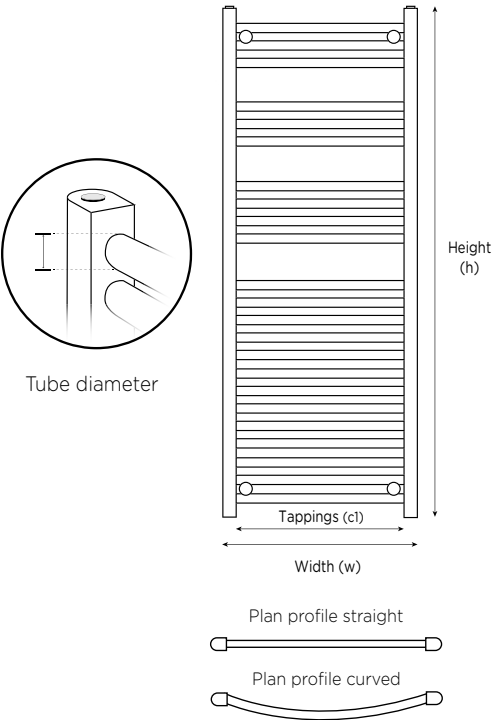


- Supplied complete with fixing kit, including plugs and vents
- Manufactured under BS EN ISO 9001 quality standards
- Pressure tested to 10 bar / maximum working pressure 7 bar
- Insulation class 1
- ON/OFF – IP 55 rated
Thermostatically Adjustable – IPX1 rated
- Element is complete with 1.5m fly-lead
- Recommended installation is carried out by a qualified electrician

SIZES	MATERIAL	COLOUR	PRESSURE TESTED TO	GUARANTEE
8	STEEL	CHROME	10 BAR	5 YEARS

SIZES	MATERIAL	COLOUR	PRESSURE TESTED TO	GUARANTEE
2	STEEL	CHROME & WHITE	10 BAR	5 YEARS

- 69 watt or 100 watt output
- Sparkling, highly polished chrome finish or a classic brilliant ice white
- Supplied complete with fixing kit
- Manufactured under BS EN ISO 9001 quality standards
- Insulation class 1
- IP 54 rated
- Element is complete with 1.5m fly-lead
- Recommended installation is carried out by a qualified electrician

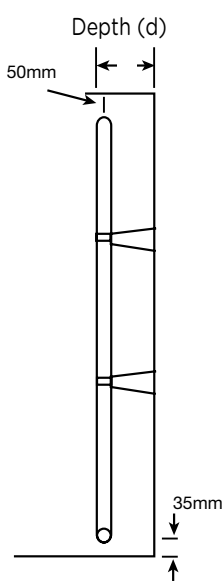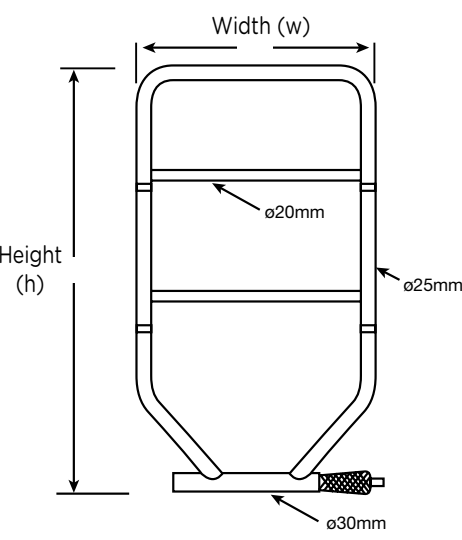

Q RAILS

Our Q-style electric towel rail comes in either a highly polished chrome or brilliant ice white finish adding a touch of class to your bathroom.

DELIVERY CODE
A
THIS ITEM NORMALLY
DISPATCHED WITHIN
48 HOURS OF ORDER

HEIGHT
OPTION
671MM

WIDTH
OPTION
533MM

Prices start
from under
£158.00
inc. VAT

Product Code (heating only)	Height (mm) (h)	Width (mm) (w)	Depth (mm) (d)	Watts	Finish	Price ex. VAT (£)	Price incl. VAT (£)
Q69W	671	533	93	69W	White	131.58	157.90
Q100W	671	533	93	100W	White	145.42	174.50
Q69C	671	533	93	69W	Chrome	120.08	144.10
Q100C	671	533	93	100W	Chrome	133.92	160.70

HEIGHT (h): 800MM	Product Code	Width (mm) (w)	C/C Tappings (mm)	Wall to C/C Tappings (mm) (c2)	Quantity of Cross Rails	Element Type	Heating Element Power (W)	Price ex. VAT (£)	Price incl. VAT (£)
Available in both straight and curved profiles	STRAIGHT								
	ESTR508C	500	455	64-86	14	ON/OFF*	150	149.08	178.90
	ETSTR508C	500	455	64-86	14	Thermostatic/adjustable	150	188.42	226.10
	CURVED								
	ECTR508C	500	455	52-74	14	ON/OFF*	150	153.67	184.40
	ETCTR508C	500	455	52-74	14	Thermostatic/adjustable	150	193.00	231.60
	STRAIGHT								
	ESTR510C	500	455	64-86	16	ON/OFF*	200	171.50	205.80
	ETSTR510C	500	455	64-86	16	Thermostatic/adjustable	150	210.83	253.00
	CURVED								
	ECTR510C	500	455	52-74	16	ON/OFF*	200	176.08	211.30
	ETCTR510C	500	455	52-74	16	Thermostatic/adjustable	150	215.42	258.50
	STRAIGHT								
	ESTR512C	500	455	64-86	20	ON/OFF*	300	194.17	233.00
	ETSTR512C	500	455	64-86	20	Thermostatic/adjustable	300	233.50	280.20
	ESTR612C	600	555	64-86	20	ON/OFF*	400	205.33	246.40
	ETSTR612C	600	555	64-86	20	Thermostatic/adjustable	600	244.75	293.70
	CURVED								
	ECTR512C	500	455	52-74	20	ON/OFF*	300	198.75	238.50
	ETCTR512C	500	455	52-74	20	Thermostatic/adjustable	300	238.08	285.70
	ECTR612C	600	555	52-74	20	ON/OFF*	400	209.92	251.90
	ETCTR612C	600	555	52-74	20	Thermostatic/adjustable	600	249.33	299.20

Notes: Chemical Mixture – Monoetilen Glycol. *Element complete with thermostatic cut-out (As shown above).

S RAILS

Our S-style electric towel rail comes in either a highly polished chrome or brilliant ice white finish adding a touch of class to your bathroom.

DELIVERY CODE
A

THIS ITEM NORMALLY
DISPATCHED WITHIN
48 HOURS OF ORDER

HEIGHT
OPTION
555MM


WIDTH
OPTION
568MM

Prices start from
£100.40
inc. VAT

Product Code (heating only)	Height (h) (mm)	Width (w) (mm)	Depth (d) (mm)	Watts	Finish	Price ex. VAT (£)	Price incl. VAT (£)
S45C	555	568	93	45W	Chrome	83.67	100.40
S45W	555	568	93	45W	White	75.00	90.00

SIZES	MATERIAL	COLOUR	PRESSURE TESTED TO	GARANTEE
1	STEEL	CHROME & WHITE	10 BAR	5 YEARS

- 45 watt output
- Sparkling, highly polished chrome finish or a classic brilliant ice white
- Supplied complete with fixing kit
- Manufactured under BS EN ISO 9001 quality standards
- Insulation class 1
- IP 4 rated
- Element is complete with 1.5m fly-lead
- Recommended installation is carried out by a qualified electrician

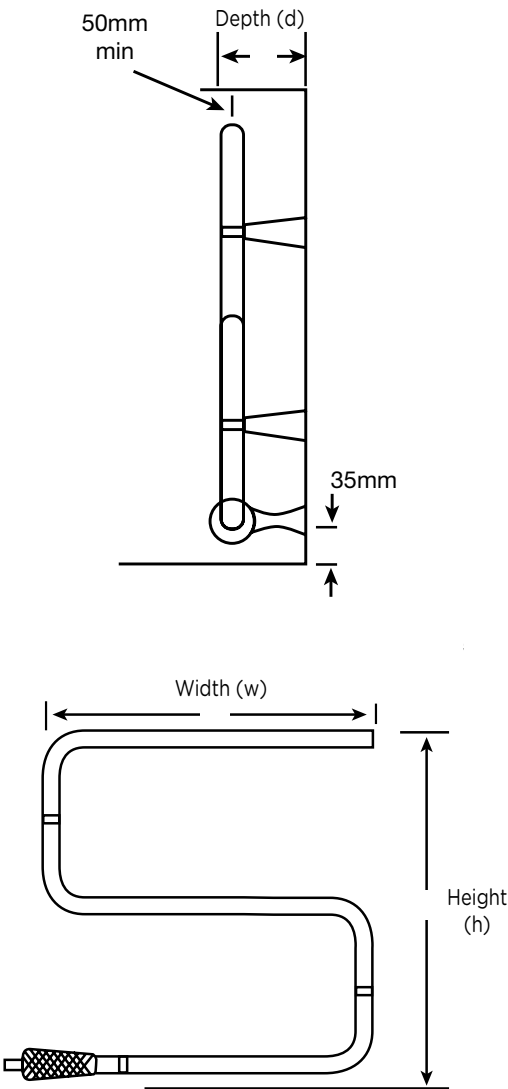


K-THERM VALVES (10 & 15mm Range)

**1 year
installed
guarantee**

- Fully Reversible
- Liquid filled sensor
- Energy efficient
- Suitable for new systems or upgrading existing installations
- Building regulations also require an automatic bypass valve
- Designed to blend with any decor
- Provides years of reliable service
- Adjustable tailpiece aids simple installation
- Positive locking of sensor to body

Technical Specifications	
Compliance	EN 215-1
Boiler Work. Pressure	10 bar
Maximum Boiler Temperature	120°C
Maximum Flow Rate	360 lt/h
Nominal Flow Rate	180 lt/h
Maximum Pressure Loss	600 mbar
Every Line Range	1°C
Usage Range	+3°C, 27°C
Sensor Type	Liquid Filled

Reversible Flow

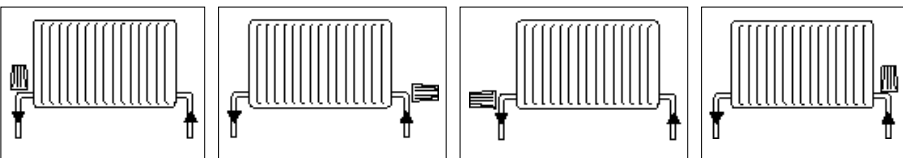

Location

The thermostat can be fitted in any orientation (horizontally or vertically) with the flow through the body in either direction.

Installation

Note: The thermostat head should not be fitted in recesses, boxing, behind curtains or be exposed directly to excessive heat as it will affect the valve's performance.



Product Code	Description	Box Quantity	Price ex. VAT (£)	Price incl. VAT (£)
TRVSA	K-Therm style angled	48	8.75	10.50
TRVSS	K-Therm style straight	48	9.17	11.00
TRVRA	Refined Angled TRV	48	18.00	21.60
TRVRAC	Refined Angled Chrome TRV	48	22.50	27.00
TRVRS	Refined Straight TRV	48	18.00	21.60
TRVRSC	Refined Straight Chrome TRV	48	22.50	27.00
TPLSTRVSA	Twin Pack TRV & Lockshield Style Angled	48	27.00	32.40
TPLSTRVRA	Twin Pack TRV & Lockshield Refined Angled	48	48.58	58.30
TPLSTRVRAC	Twin Pack TRV & Lockshield Refined Angled Chrome	48	64.83	77.80

Galaxy Valves



Style Valves



Product Code	Description	Box Quantity	Price ex. VAT (£)	Price incl. VAT (£)
LSWHGA/15	15mm Angled LS/WH Radiator Valve	60	3.17	3.80
LSWHGA/10	10mm Angled LS/WH Radiator Valve	60	3.17	3.80
LSDOGA/15	15mm Angled Lockshield with DOC	50	4.50	5.40
LSDOGA/10	10mm Angled Lockshield with DOC	50	4.50	5.40

Notes: Complete with Wheelhead and Lockshield tops. 1/2" connection - 3/4" nut. Available as straight or angled.

Product Code	Description	Box Quantity	Price ex. VAT (£)	Price incl. VAT (£)
LSWHSA/15	15mm Angled LS/WH	60	3.00	3.60
LSWHSA/10	10mm Angled LS/WH	60	3.00	3.60
LSDOSA/15	15mm Angled Lockshield with DOC	50	4.42	5.30
LSDOSA/10	10mm Angled Lockshield with DOC	50	4.42	5.30

Notes: Complete with Wheelhead and Lockshield tops. 1/2" connection - 1/2" nut. Available as straight or angled.

CUSTOM VALVES

Kartell Valves

For those who feel that less is more, the smooth, unfussy lines of the K-Therm range of valves will appeal. Minimalist in character, it gives an uncluttered finish to the modern radiator.



Corner Valves

The chrome corner valve gives a neat and professional finish by allowing the pipework to be taken straight into the wall, therefore ensuring the head does not protrude into the room.



Oval Valves

The stainless steel designer valves are available in brushed or polished finish, in an oval shape which would complement any of our designer range. Sold with a complete range of accessories.



Square Valves

Cleverly uncomplicated, the simple sophistication of the Square Valve adds a luxurious finishing touch to any designer radiator.



1 year
installed
guarantee

Product Code	Description	Box Quantity	Price ex. VAT (£)	Price incl. VAT (£)
KART-ANG	Modern chrome manual angled	30	13.50/pair	16.20/pair
KART-STR	Modern chrome manual straight	30	13.50/pair	16.20/pair

Product Code	Description	Box Quantity	Price ex. VAT (£)	Price incl. VAT (£)
CRNV	Corner valve (pair)	30	27.00/pair	32.40/pair

Product Code	Description	Box Quantity	Price ex. VAT (£)	Price incl. VAT (£)
ELLIP-AG-C	Oval Radiator Valves (Pair) - Angled Chrome	30	108.00/pair	129.60/pair
ELLIP-AG-SN	Oval Radiator Valves (pair) - Angled Brushed	30	108.00/pair	129.60/pair

Notes: Oval valves are available in brushed or polished finish, but only in angled.

Product Code	Description	Box Quantity	Price ex. VAT (£)	Price incl. VAT (£)
SQR-ANG	Square Angled Valve (Pair)	30	36.00/pair	43.20/pair
SQR-STR	Square Straight Valve (Pair)	30	36.00/pair	43.20/pair

CUSTOM VALVES

Times Valves

The Times range provides a contemporary upgrade to any radiator. The spoke heads on this chrome valve offer a practical yet exciting alternative to the most common valve.



Cube Valves

Stylish and sophisticated, the Cube Valve adds a luxurious finishing touch to any of our designer radiators.



Aspen Valves

The Aspen Valves are an oval shape with a chrome finish. They are available in either angled or straight, and sold with a complete range of accessories.



Traditional Valves

The authentic styling means that these valves are perfectly suited to period properties, but also add a traditional twist to any contemporary home. These traditional radiator valves are set in either a chrome or brass finish and styled with a mahogany wood-effect wheel handle.



1 year
installed
guarantee

Product Code	Description	Box Quantity	Price ex. VAT (£)	Price incl. VAT (£)
CROSS-ANG	Times Angled Valve (Pair)	30	27.00/pair	32.40/pair
CROSS-STR	Times Straight Valve (Pair)	30	27.00/pair	32.40/pair

Product Code	Description	Box Quantity	Price ex. VAT (£)	Price incl. VAT (£)
CUBE-ANG	Cube Angled Valve (Pair)	30	27.00/pair	32.40/pair
CUBE-STR	Cube Straight Valve (Pair)	30	27.00/pair	32.40/pair

Product Code	Description	Box Quantity	Price ex. VAT (£)	Price incl. VAT (£)
ASP-ANG	Aspen Radiator Valves (Pair) - Angled Chrome	30	36.00/pair	43.20/pair
ASP-STR	Aspen Radiator Valves (pair) - Straight Chrome	30	36.00/pair	43.20/pair

Notes: Aspen valves available in angled or straight, but only in a chrome finish.

Product Code	Description	Box Quantity	Price ex. VAT (£)	Price incl. VAT (£)
TRAD-ANG-B	Old School Valve (Pair) Brass Angled	12	54.00/pair	64.80/pair
TRAD-ANG-C	Old School Valve (Pair) Chrome Angled	12	54.00/pair	64.80/pair

ACCESSORIES

Towel Rail E & HE Element Options

Central Heating MODEL Plumbs directly into the central heating system.



Model E
Electric Only Version (additional option)
Gives designer warmth as a stand-alone radiator for applications without a central heating system.



Model HE
SUMMER ELECTRIC HEATER (additional option)
Plumbed into the central heating system, this can also be used for heat in the bathroom when the system is switched off. Provides year round towel airing.
E & HE options are on-off operation only.




Product Code	Description	Length (mm)	Suitable TR heights (mm)			Price ex. VAT (£)	Price incl. VAT (£)
			19mm	22mm	25mm		
E	Electric Only		All			108.00	129.60
HE150	Dual Fuel 150W element	300	All			54.00	64.80
HE300	Dual Fuel 300W element	450		800 / 1000 / 1200	750/1000	59.42	71.30
HE600	Dual Fuel 600W element	750		1600 / 1800	1300/1800	64.83	77.80
TE300	Dual Fuel 300W thermostatic element	500		800 / 1000 / 1200	750/1000	108.00	129.60
TE600	Dual Fuel 600W thermostatic element	750		1600 / 1800	1300/1800	118.83	142.60

* All dual fuel elements include t-piece and blanking plug

Sleeve Kits

To complete the look, disguise plumbing and cabling with carefully designed pipe sleeves and valve feet, matched to your radiator finish for the last word in seamless elegance.

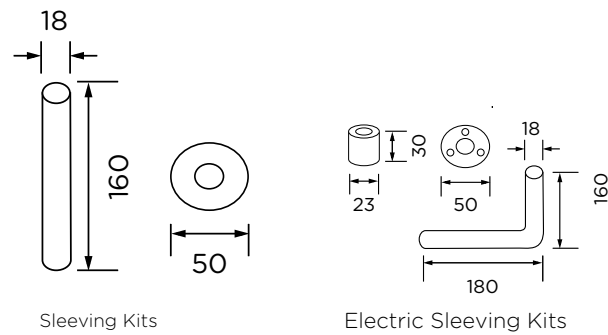

Product Code	Description	Price ex. VAT (£)	Price incl. VAT (£)
PSKITC-02	Sleeving Kits (Pair) Chrome	35.67	42.80
ZXELE-SKC	Chrome Sleeving Kit for Electrical Elements (not POLI)	64.83	77.80

NOTES